



EASY AND RELIABLE OPENING
GEZE FANLIGHT OPENERS OL 90 N, OL 95 AND OL 320



Table of Contents

Foreword	GEZE Fanlight Opener Systems (OL)	4
	Overview of Manual Fanlight Opener Systems	5
Chapter 1	GEZE OL 90 N	
	Introduction	6
	Rectangular windows	8
	Special shape: Angular window	10
	Special shape: Triangular windows	12
	Special shape: Round and segmental arch windows	14
	Top hung, outward-opening	17
Chapter 2	GEZE OL 95	20
	Order information: GEZE OL 90 N and GEZE OL 95	23
	Accessories: GEZE OL 90 N and GEZE OL 95	27
Chapter 3	GEZE OL 320	37
	Order information: GEZE OL 320	40
	Accessories: GEZE OL 320 42	42
	GEZE gripping and cleaning scissor stay (FPS)	46
	GEZE OL 90 N and OL 95 - photographic overview	48
	References	49
	Packaging unit applications: GEZE OL 90 N	50

GEZE SLIMLINE FANLIGHT OPENERS

GEZE Fanlight Opener Systems (OL)

Daily ventilation made easy

The manual window opening systems are used for convenient, daily ventilation.

GEZE slimline scissor stays open fanlights with opening widths up to 320 mm.

The range of applications includes rectangular, inward-opening bottom-hung or top-hung casements and outward-opening top-hung windows. Solutions are also available for special shapes, e.g. angular, triangular, round and segmental arch windows.

The outstanding features of GEZE fanlight opener systems are their excellent user friendliness and ease of installation.

RAL quality mark



The GEZE slimline fanlight openers OL 90 N and OL 95 fulfil the extensive requirements of the RAL quality protection targets and the high RAL quality level.

GEZE supplies different types of manual fanlight openers.

The table on the following page gives an overview of these.

OL 90 N



Slimline fanlight opener with a large number of variation options

OL 90 N Top-hung, outward-opening



Slimline fanlight opener with burglary resistant lock

OL 95



Slimline fanlight opener especially for post/rail (stick) constructions

OL 320



Slimline fanlight opener with large opening width and heavy casements

GEZE SLIMLINE FANLIGHT OPENERS

Overview of Manual Fanlight Opener Systems

	GEZE OL 90 N	GEZE OL 90 N Top-hung, outward-opening	GEZE OL 95	GEZE OL 320
Area of application				
For vertically installed window casements made of wood, plastic or metal	•	•	•	•
Window shape				
Rectangular	•	•	•	•
Angular	•		•	•
Triangular	•		•	•
Round and segmental arch	•			
Type of opening				
Inward-opening	•		•	•
Outward-opening		•		
Technical data				
Length of the OL scissor stay	242 mm	274 mm	305 mm	436 mm
Depth of the OL scissor stay	49 mm	61 mm	49 mm	65 mm
Height of the OL scissor stay	16 mm	60 mm	16 mm	26 mm
Max. opening width	170 mm	170 mm	220 mm	320 mm
Max. panel weight	40 kg/m ²	30 kg/m ²	30 kg/m ²	140 kg/m ²
Max. casement weight	80 kg	80 kg	60 kg	250 kg
Min. casement width	380 mm	600 mm	440 mm	680 mm
Max. casement width with one scissor stay	1 200 mm	1 200 mm	1 200 mm	1 200 mm
Max. casement width with two scissor stays	2 400 mm	2 400 mm	2 400 mm	2 400 mm
Max. casement width with three scissor stays	3 600 mm	–	3 000 mm	3 600 mm
Min. casement height	250 mm	370 mm	350 mm	400 mm
Space requirement, min. to max.	19–27 mm	28–35 mm	21–27 mm	30–36 mm
Functions				
Adjustable opening width (stroke reduction)	•	•	•	•
Casement lock integrated in the scissor stay	•	•	•	•
Scissor stay unhooked by release button	•	•	•	•
Burglary resisting lock (SKG)		•		
Lockable	•		•	
Unhinging inhibitor	•		•	•
Page	6	17	20	37

• = Yes

GEZE SLIMLINE FANLIGHT OPENERS

GEZE OL 90 N

Surface-mounted slimline fanlight opener with an opening width of 170 mm




This fanlight opener is used on vertically installed, inward-opening rectangular windows with bottom-hung, top-hung, side-hung and horizontally pivot-hung casements made of wood, plastic or metal.

Solutions are also available for special shapes, e.g. angular, triangular, round and segmental arch windows.


The GEZE OL 90 N fulfils the extensive requirements of the RAL quality protection targets and the high RAL quality level.

GEZE OL 90 N

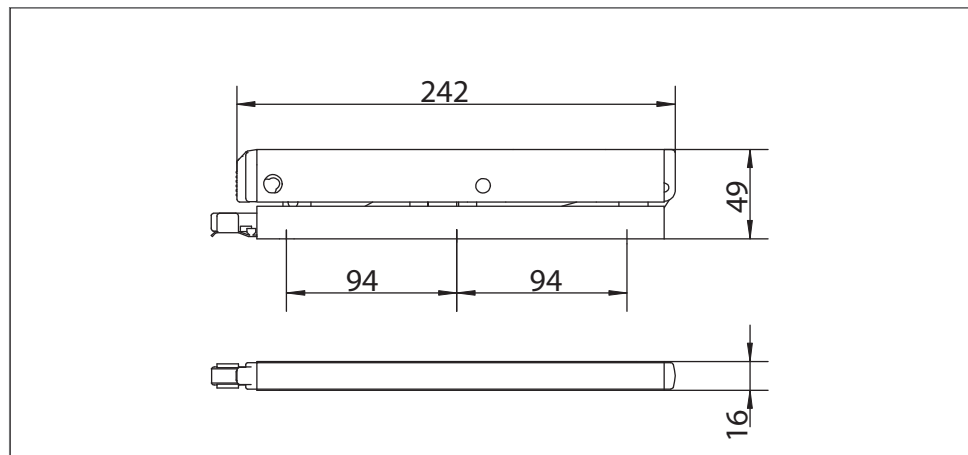


GEZE SLIMLINE FANLIGHT OPENERS


OL 90 N installation drawings for rectangular, angular, triangular, round and segmental arch windows

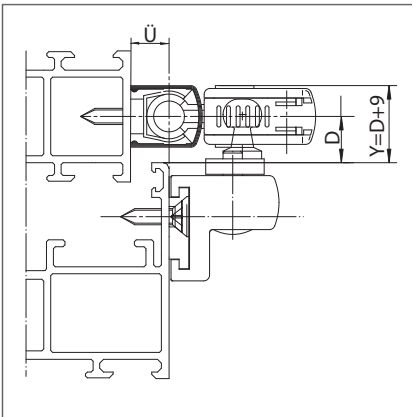


GEZE OL 90 N on light alloy window with overlap

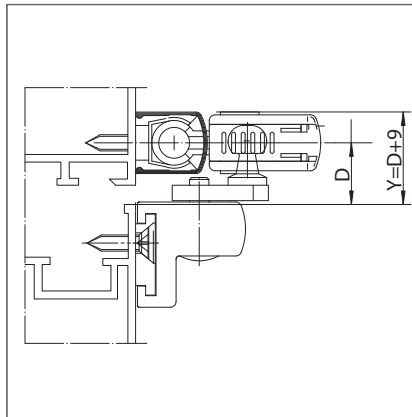

GEZE OL 90 N on light alloy window, flushclosing

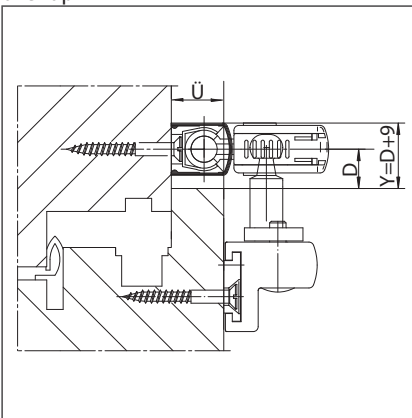

GEZE OL 90 N on wooden window, Euro-groove

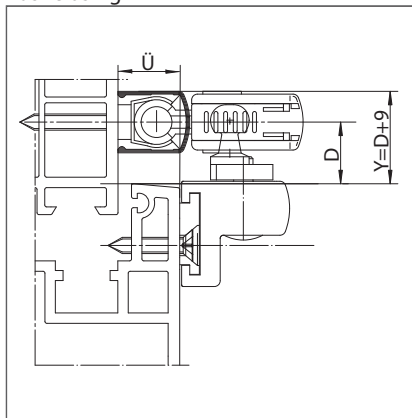

GEZE OL 90 N on plastic window

D = Distance between outer edge of casement and middle of rod

Y = Upper space requirement

Ü = Overlap height

GEZE SLIMLINE FANLIGHT OPENERS

GEZE OL 90 N for rectangular windows

Surface-mounted slimline fanlight opener for rectangular windows with an opening width of 170 mm

The OL 90 N achieves the full opening width of 170 mm with all casement heights. The flat design of the scissor stay and the rod assembly require little space above and to the side of the window casement. Completely preassembled assembly groups make installation easier. The scissor stays and the rod can be installed from the front. Rebate inaccuracies are automatically levelled out by an adjustable pressure setting. Fastening screws are not visible, the clear lines of the OL 90 N therefore remain uninterrupted. The lock in the scissor stay ensures secure casement locking. The easy unhooking of the scissor stay with the help of the release button enables the windows to be cleaned from the inside and outside.

GEZE OL 90 N
Rectangular windows




Area of application

- For vertically installed bottom-hung, top-hung, side-hung and horizontally pivot-hung casements, inward-opening, made of wood, plastic or metal
- With overlap heights of 0-25 mm
- Max. leaf weight 80 kg

Product features	GEZE OL 90 N rectangular windows
Opening width (max.)	170 mm
Casement width (min.)	380 mm
Casement height (min.)	250 mm
Casement weight (max.)	80 kg
Fitting stroke	54 mm
Length	242 mm
Depth	49 mm
Height	16 mm
Functions	
Adjustable opening width (stroke reduction)	●
Casement lock integrated in the scissor stay	●
Scissor stay unhooked by release button	●
Burglary resisting lock (SKG)	●*
Lockable	●
Unhinging inhibitor	●

● = Yes
* = in conjunction with the lock carrier and concealed locks

OL 90 N installation drawing for rectangular windows

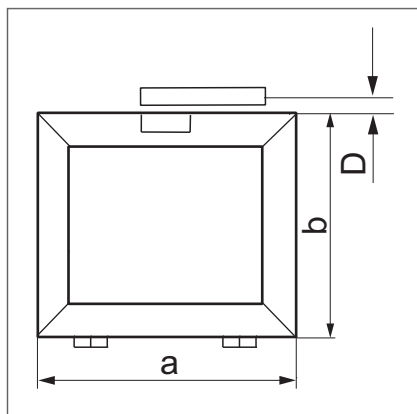

Limits of use

Number of scissor stays	Casement width a (min.)	Casement width a (max.)	Casement height b (min.)	Casement weight (max.)	Panel weight (max.)
1	380 mm	1 200 mm	250 mm	80 kg	40 kg/m ²
2	1 201 mm	2 400 mm			25 kg/m ²
3	2 401 mm	3 600 mm			

Adjustable dimensions and space requirement

Casement height b (min.)	Casement height b (max.)	Adjustable dimension D (min.) top	Space requirement Y, top
250 mm	300 mm	16–18 mm	D(min) + 9 mm
301 mm	400 mm	14–18 mm	
401 mm	500 mm	12–18 mm	
501 mm		10–18 mm	

GEZE SLIMLINE FANLIGHT OPENERS

GEZE OL 90 N
/OL 95/OL320

Manual Fanlight
Opener Systems

GEZE OL 90 N special shape for angular windows

Surface-mounted slimline fanlight opener for angular windows with an opening width of 170 mm

The OL 90 N achieves the full opening width of 170 mm with all casement heights. The flat design of the scissor stay and the rod assembly require little space above and to the side of the window casement. Completely preassembled assembly groups make installation easier. The scissor stays and the rod can be installed from the front. Rebate inaccuracies are automatically levelled out by an adjustable pressure setting. Fastening screws are not visible, the clear lines of the OL 90 N therefore remain uninterrupted. The lock in the scissor stay ensures secure casement locking. The easy unhooking of the scissor stay with the help of the release button enables the windows to be cleaned from the inside and outside.



Area of application

- For vertically installed angular bottom-hung casements, inward-opening, made of wood, plastic or metal
- With overlap heights of 0-25 mm
- Max. leaf weight 80 kg
- Only one scissor stay may be mounted on each window
- Additional locks are recommended from a casement width of 1000 mm

Product features	GEZE OL 90 N for angular windows
Opening width (max.)	170 mm
Casement width (min.)	380 mm
Casement height (min.)	250 mm
Casement weight (max.)	80 kg
Length	242 mm
Depth	49 cm
Height	16 mm
Functions	
Adjustable opening width (stroke reduction)	●
Casement lock integrated in the scissor stay	●
Scissor stay unhooked by release button	●
Burglary resisting lock (SKG)	○
Lockable	●
Unhinging inhibitor	●

● = Yes
○ = No

OL 90 N installation drawings for angular windows

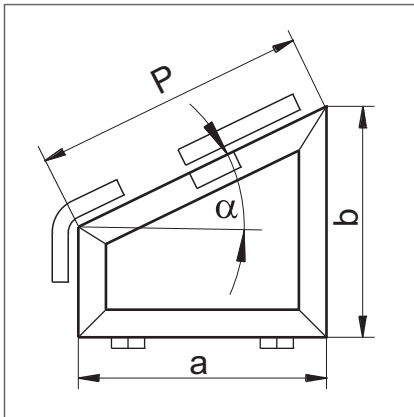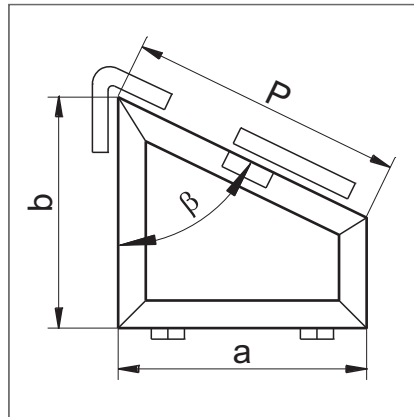Angular window, $\alpha < 60^\circ$ Special case angular window, $\beta > 60^\circ$

Limits of use

Tilt angle	Casement width a (min.)	Casement height b (min.)	Casement weight (max.)	Panel weight (max.)	Long side length P
$\alpha \leq 30^\circ$	420 mm	400 mm	80 kg	30 kg/m ²	420–2 000 mm
$\alpha=30^\circ-40^\circ$	360 mm	550 mm			
$\alpha=40^\circ-50^\circ$	320 mm	650 mm			
$\alpha=50^\circ-60^\circ$	270 mm	750 mm			
Special shape					
$\beta= \geq 60^\circ$	420 mm	600 mm	40 kg	25 kg/m ²	420–1 000 mm

Adjustable dimensions and space requirement

Operation	Adjustable dimension D (min.) top	Space requirement X side	Adjustable dimension D (min.) side	Space requirement Y, top
with additional lock	10–18 mm	D(min) + 9 mm	—	D(min) + 9 mm
Hand lever	10 mm	D(min) + 10 mm	10 mm	

GEZE SLIMLINE FANLIGHT OPENERS

GEZE OL 90 N special shape for triangular windows

Surface-mounted slimline fanlight opener for triangular windows with an opening width of 170 mm

The OL 90 N achieves the full opening width of 170 mm with all casement heights.

The flat design of the scissor stay and the rod assembly require little space above and to the side of the window casement.

Completely preassembled assembly groups make installation easier. The scissor stays and the rod can be installed from the front.

Rebate inaccuracies are automatically levelled out by an adjustable pressure setting. Fastening screws are not visible, the clear lines of the OL 90 N therefore remain uninterrupted.

The lock in the scissor stay ensures secure casement locking.

The easy unhooking of the scissor stay with the help of the release button enables the windows to be cleaned from the inside and outside.


Area of application

- For vertically installed bottom-hung casements, inward-opening, made of wood, plastic or metal
- With overlap heights of 0-25 mm
- Max. leaf weight 80 kg
- Only one scissor stay may be mounted on each window
- Additional locks are recommended from a casement width of 1000 mm

Product features	GEZE OL 90 N for triangular windows
Opening width (max.)	170 mm
Casement width (min.)	380 mm
Casement height (min.)	250 mm
Casement weight (max.)	80 kg
Length	242 mm
Depth	49 mm
Height	16 mm
Functions	
Adjustable opening width (stroke reduction)	●
Casement lock integrated in the scissor stay	●
Scissor stay unhooked by release button	●
Burglary resisting lock (SKG)	○
Lockable	●
Unhinging inhibitor	●

● = Yes

○ = No

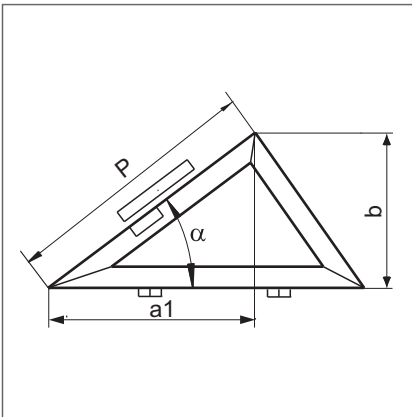OL 90 N installation drawing for triangular windows**Limits of use**

Tilt angle	Casement width a1 (min.)	Casement height b (min.)	Casement weight (max.)	Panel weight (max.)	Long side length P
$\alpha \leq 30^\circ$	700 mm	400 mm	80 kg	30 kg/m ²	420–2 000 mm
$\alpha=30^\circ-40^\circ$	650 mm	550 mm			
$\alpha=40^\circ-50^\circ$	550 mm	650 mm			
$\alpha=50^\circ-60^\circ$	450 mm	750 mm			
Special shape					
$\beta= \geq 60^\circ$		600 mm	40 kg	25 kg/m ²	420–1 000 mm

Adjustable dimensions and space requirement

Operation	Adjustable dimension D (min.) top	Space requirement X side	Adjustable dimension D (min.) side	Space requirement Y, top
with additional lock	10–18 mm	D(min) + 9 mm	–	D(min) + 9 mm
Hand lever	10 mm	D(min) + 10 mm	10 mm	

GEZE SLIMLINE FANLIGHT OPENERS

GEZE OL 90 N special shape for round and segmental arch windows

Surface-mounted slimline fanlight opener for round and segmental arch windows with an opening width of 170 mm

The OL 90 N achieves the full opening width of 170 mm with all casement heights. The flat design of the scissor stay and the rod assembly require little space above and to the side of the window casement. Completely preassembled assembly groups make installation easier. The scissor stays and the rod can be installed from the front. Rebate inaccuracies are automatically levelled out by an adjustable pressure setting. Fastening screws are not visible, the clear lines of the OL 90 N therefore remain uninterrupted. The lock in the scissor stay ensures secure casement locking. The easy unhooking of the scissor stay with the help of the release button enables the windows to be cleaned from the inside and outside.

GEZE OL 90 N
Round windows




Area of application


- For vertically installed bottom-hung casements, inward-opening, as round or segmental arch windows made of wood, plastic or metal
- With overlap heights of 0-25 mm
- Max. leaf weight 80 kg

Product features	GEZE OL 90 N for round and segmental arch windows
Opening width (max.)	170 mm
Casement width (min.)	380 mm
Casement height (min.)	250 mm
Casement weight (max.)	80 kg
Length	242 mm
Depth	49 mm
Height	16 mm
Functions	
Adjustable opening width (stroke reduction)	○
Casement lock integrated in the scissor stay	●
Scissor stay unhooked by release button	●
Burglary resisting lock (SKG)	○
Lockable	●
Unhinging inhibitor	●


- = Yes
- = No

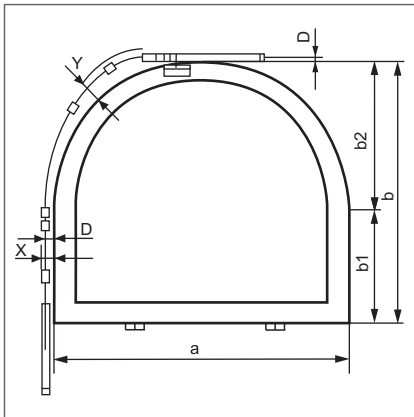OL 90 N installation drawings for semicircular arched windows


Rebate GEZE OL 90 N semicircular arched window with 1 scissor stay

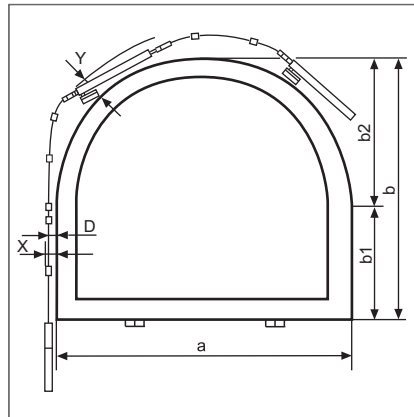

Rebate GEZE OL 90 N semicircular arched window with 2 scissor stays

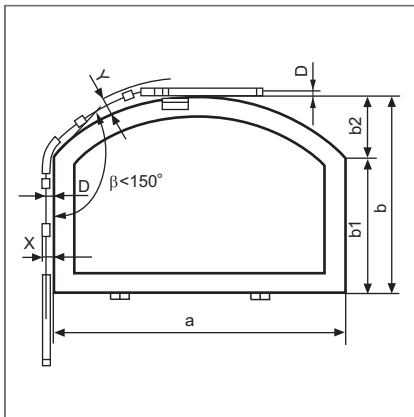OL 90 N installation drawings for segmental arch windows

Rebate GEZE OL 90 N segmental arch window with 1 scissor stay

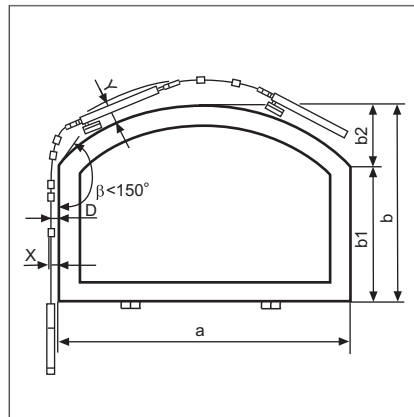

Rebate GEZE OL 90 N segmental arch window with 2 scissor stays

Limits of use


Angle β	Number of scissor stays	Casement width a (min.)	Casement width a (max.)	Casement height b (min.)	Casement weight (max.)	Panel weight (max.)
> 150°	1	500 mm	1 300 mm	300 mm	80 kg	40 kg/m ²
	2	1 301 mm	2 400 mm	650 mm		
< 150°	1	500 mm	1 300 mm	250 mm		
	2	1 301 mm	2 400 mm	500 mm		

Adjustable dimensions and space requirement

Casement height b (min.)	Casement height b (max.)	Adjustable dimension D (min.) top	Space requirement X side	Adjustable dimension D (min.) side	Space requirement Y, top
250 mm	300 mm	16 mm	D(min) + 10 mm	12 mm oder 10/14	see diagram
301 mm	400 mm	12–16 mm			
401 mm		10–16 mm			

GEZE SLIMLINE FANLIGHT OPENERS

D dimension and top space requirement for round and segmental arch windows

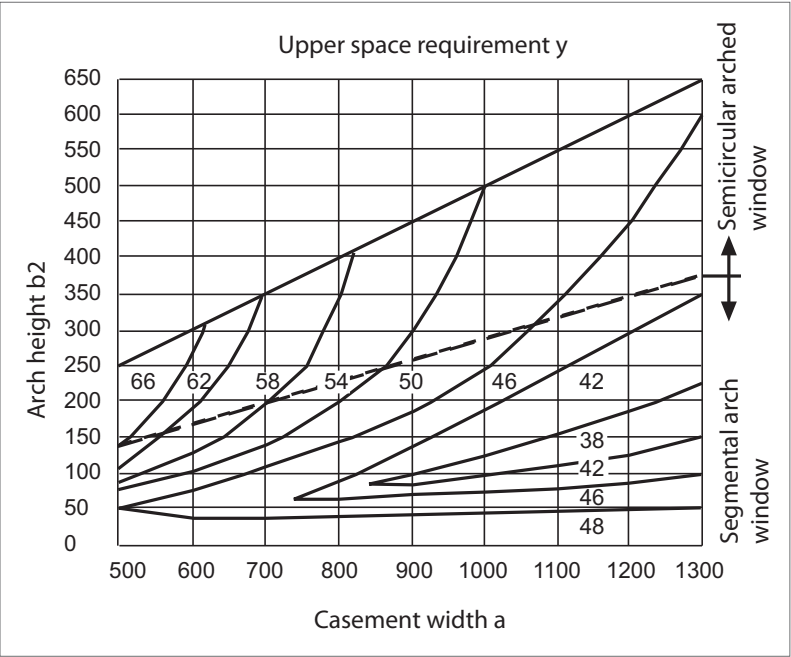

GEZE SLIMLINE FANLIGHT OPENERS

GEZE OL 90 N Top-hung, outward-opening

Slimline fanlight opener with burglary resistant lock




The OL 90 N top-hung, outward-opening achieves the full opening width of 170 mm with all casement heights. The flat design of the scissor stay and the rod assembly require little space below and to the side of the window casement. Completely preassembled assembly groups make installation easier. The scissor stays and the rod can be installed from the front. Rebate inaccuracies are automatically levelled out by an adjustable pressure setting. Fastening screws are not visible, the clear lines of the OL 90 N top-hung, outward-opening therefore remain uninterrupted.

The lock in the scissor stay ensures secure casement locking.

The easy unhooking of the scissor stay with the help of the release button enables the windows to be cleaned from the inside and outside.

This fanlight opener has an SKG certified, burglary resistant lock.

GEZE OL 90 N Top-hung, outward-opening

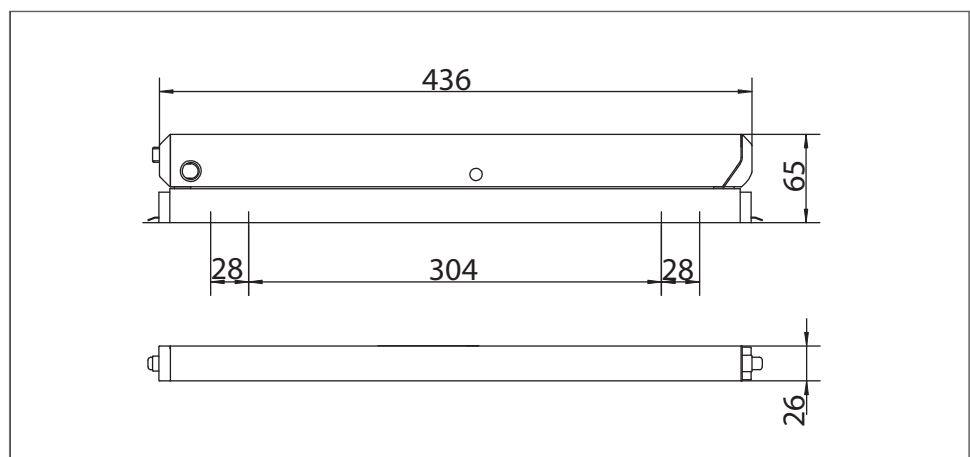

Area of application

- For vertically installed top-hung casements, outward-opening, made of wood, plastic or metal
- Suitable for reveal depths of 0 - 60 mm
- Can be operated from the left and right
- Operation possible by means of hand lever, crank rod or electric linear drive

GEZE SLIMLINE FANLIGHT OPENERS


GEZE OL 90 N
/OL 95/OL320

Manual Fanlight
Opener Systems


Product features	GEZE OL 90 N Top-hung, outward-opening
Opening width (max.)	170 mm
Casement width (min.)	600 mm
Casement height (min.)	370 mm
Casement weight (max.)	80 kg
Length	242 mm
Depth	49 mm
Height	16 mm
Functions	
Adjustable opening width (stroke reduction)	●
Casement lock integrated in the scissor stay	●
Scissor stay unhooked by release button	●
Burglary resisting lock (SKG)	●
Lockable	○
Unhinging inhibitor	○

- = Yes
- = No

OL 90 N top-hung, outward-opening - installation drawings

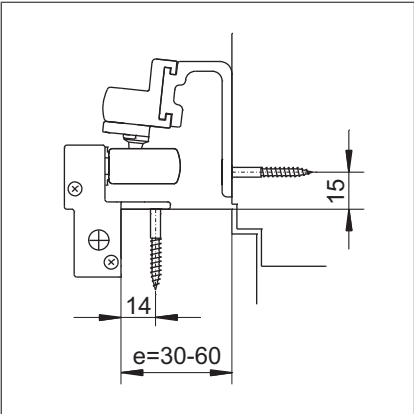


OL 90 N top-hung, outward-opening on wooden windows, Euro-groove, reveal depth 30-60 mm

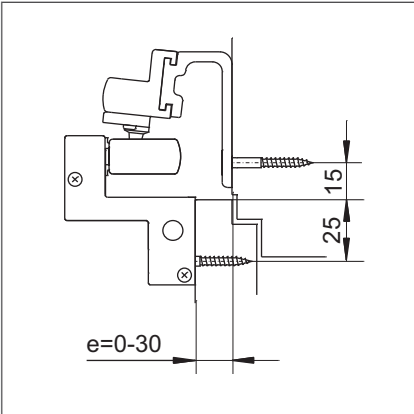

OL 90 N top-hung, outward-opening on wooden windows, Euro-groove, reveal depth 0-30 mm

e = reveal depth

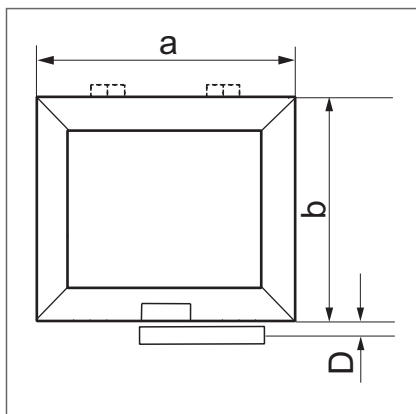OL 90 N top-hung, outward-opening installation drawing for rectangular windows**Limits of use**

Number of scissor stays	Casement width a (min.)	Casement width a (max.)	Casement height b (min.)	Casement weight (max.)	Panel weight (max.)
1	600 mm	1 000 mm	370 mm	80 kg	30 kg/m ²
	1 001 mm	1 200 mm			
2	1 201 mm	1 500 mm			
	1 501 mm	2 400 mm			

GEZE OL 90 N Top-hung, outward-opening rectangular windows

GEZE SLIMLINE FANLIGHT OPENERS


GEZE OL 95

Surface-mounted slimline fanlight opener for rectangular windows with an opening width of 220 mm



The OL 95 achieves the full opening width of 220 mm with all casement heights. The flat design of the scissor stay and the rod assembly require little space above and to the side of the window casement. Thanks to its low construction height it can be inconspicuously installed in post/rail (stick) constructions. Completely preassembled assembly groups make installation easier. The scissor stays and the rod can be installed from the front. Rebate inaccuracies are automatically levelled out by an adjustable pressure setting. Fastening screws are not visible, the clear lines of the OL 95 therefore remain uninterrupted. The lock in the scissor stay ensures secure casement locking. The easy unhooking of the scissor stay with the help of the release button enables the windows to be cleaned from the inside and outside. The GEZE OL 95 fulfils the extensive requirements of the RAL quality protection targets and the high RAL quality level.

GEZE OL 95

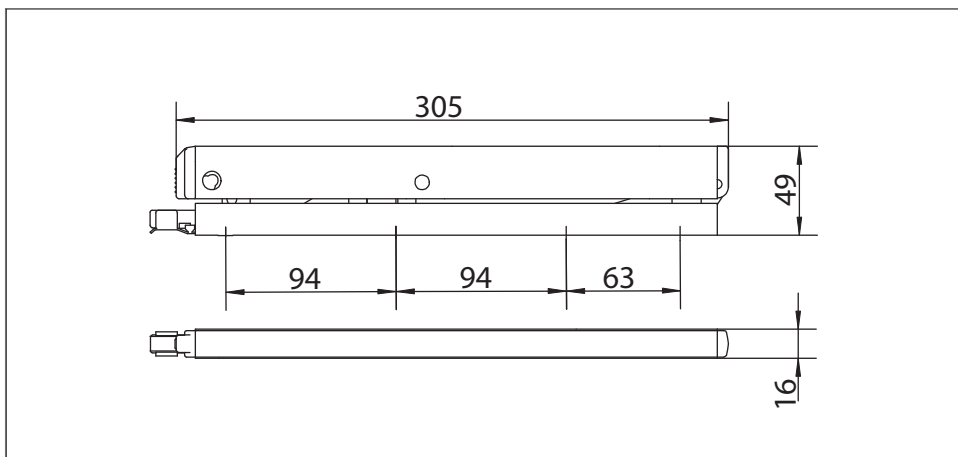


Area of application

- Primarily used in post/rail (stick) constructions
- For vertically installed bottom-hung, top-hung, side-hung and horizontally pivot-hung casements, inward-opening, made of wood, plastic or metal
- Suitable for overlap heights of 0-25 mm
- Leaf weights of up to 60 kg


GEZE SLIMLINE FANLIGHT OPENERS

Product features	GEZE OL 95
Opening width (max.)	220 mm
Casement width (min.)	440 mm
Casement height (min.)	350 mm
Casement weight (max.)	60 kg
Fitting stroke	54 mm
Length	305 mm
Depth	49 mm
Height	16 mm
Functions	
Adjustable opening width (stroke reduction)	●
Casement lock integrated in the scissor stay	●
Scissor stay unhooked by release button	●
Burglary resisting lock (SKG)	○
Lockable	●
Unhinging inhibitor	●
● = Yes	
○ = No	


OL 95 installation drawings for rectangular windows

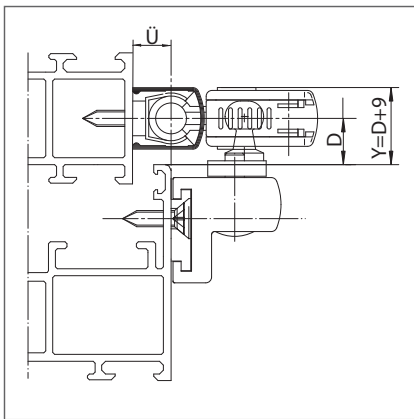


GEZE OL 95 on light alloy window with overlap

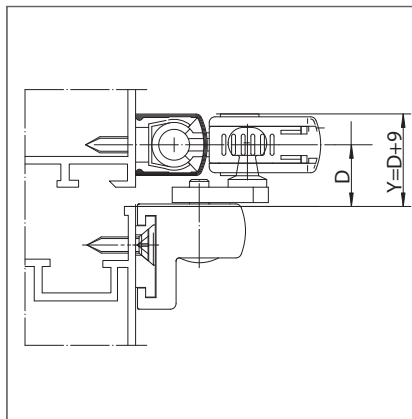

GEZE OL 95 on light alloy window, flush-closing

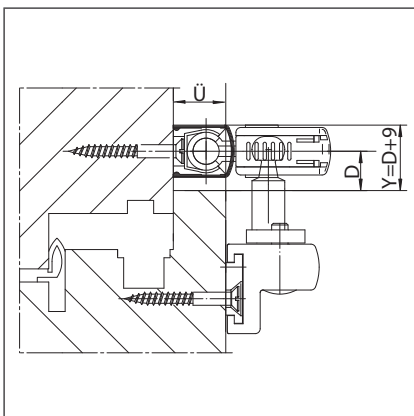

GEZE OL 95 on wooden window, Euro-groove

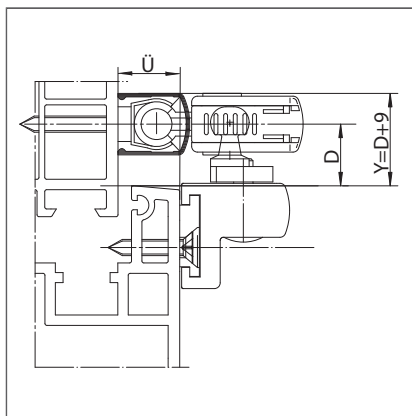


GEZE OL 95 on plastic window

D = Distance between outer edge of casement and middle of rod

Y = Upper space requirement

Ü = Overlap height

OL 95 installation drawing for rectangular windows

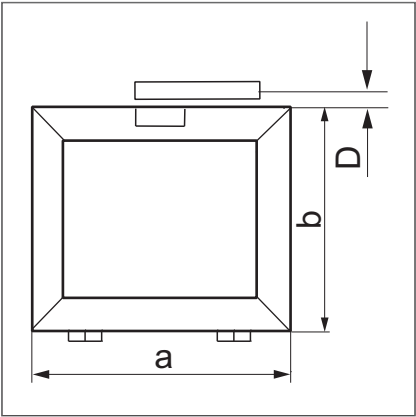

Limits of use

Number of scissor stays	Casement width a (min.)	Casement width a (max.)	Casement height b (min.)	Casement weight (max.)	Panel weight (max.)
1	440 mm	1 200 mm	350 mm	60 kg	30 kg/m ²
2	1 201 mm	2 400 mm			25 kg/m ²
3	2 401 mm	3 600 mm			

Adjustable dimensions and space requirement

Casement height b (min.)	Casement height b (max.)	Adjustable dimension D (min.) top	Space requirement Y, top
350 mm	400 mm	18 mm	D(min) + 9 mm
401 mm	450 mm	16–18 mm	
451 mm	600 mm	14–18 mm	
601 mm	601 mm	12–18 mm	

GEZE OL 95
Rectangular window



GEZE SLIMLINE FANLIGHT OPENERS

Order information

Description	Version	ID No.
GEZE OL 90 N Scissor stay with standard casement bracket	EV1	030373
	dark bronze	030374
	white RAL 9016	030377
	black	074509
	to RAL	030376
GEZE OL 90 N Scissor stay lockable, with casement bracket	EV1	029183
	dark bronze	029184
	white RAL 9016	029187
	to RAL	029186
GEZE OL 90 N Scissor stay with sliding casement bracket	EV1	030596
	dark bronze	030597
	white RAL 9016	030600
	black	074511
	to RAL	030599
GEZE OL 90 N Scissor stay without casement bracket	EV1	071203
	dark bronze	071204
	white RAL 9016	071207
	black	099477
	to RAL	071206
GEZE OL 90 N Scissor stay with unhinging inhibitor and casement bracket	EV1	030498
	dark bronze	030499
	white RAL 9016	030502
	to RAL	030501
GEZE OL 90 N Scissor stay for top-hung, outward-opening casements, left, reveal depth 0-30 mm, with casement bracket	EV1	118060
	white RAL 9016	118081
	to RAL	118082
GEZE OL 90 N Scissor stay for top-hung, outward-opening casements, right, reveal depth 0-30 mm, with casement bracket	EV1	117700
	white RAL 9016	117771
	to RAL	117772
GEZE OL 90 N Scissor stay for top-hung, outward-opening casements, left, reveal depth 30-60 mm, with casement bracket	EV1	118083
	white RAL 9016	118084
	to RAL	118085
GEZE OL 90 N Scissor stay for top-hung, outward-opening casements, right, reveal depth 30-60 mm, with casement bracket	EV1	117773
	white RAL 9016	117774
	to RAL	117775
GEZE OL 95 scissor stay with standard casement bracket	EV1	082445
	white RAL 9016	082448
	to RAL	082449
GEZE OL 95 scissor stay without casement bracket	EV1	084194
	dark bronze	084195
	white RAL 9016	084197
	black	084198
	to RAL	084199
GEZE OL 95 scissor stay with unhinging inhibitor and casement bracket	EV1	082638
	dark bronze	082639
	white RAL 9016	082641
	to RAL	082643

GEZE SLIMLINE FANLIGHT OPENERS

Order information

Description	Version	ID No.
Installation materials		
Cover profile OL 90 Length 2000 mm Available from stock Fixpack (25)	EV1	030401
	dark bronze	030402
	white RAL 9016	030405
	black	074537
	to RAL	030404
Cover profile OL 90 Length 3000 mm Available from stock Fixpack (25)	EV1	030396
	dark bronze	030397
	white RAL 9016	030400
	black	074539
	to RAL	030399
Cover profile OL 90 Length 6000 mm Available from stock Fixpack (25)	LM raw	027556
	EV1	027558
	dark bronze	027559
	white RAL 9016	027561
	black	074540
	to RAL	028342
Rod Ø 8 mm Available from stock Fixpack (25)	L=2000 mm galvanised	016555
	L=3000 mm galvanised	016591
	L=6000 mm galvanised	016592
Drilling template For wooden windows		054799
Drilling template For metal and plastic windows		054800
Drilling template for 2-scissor stay arched window F45		071861
Accessories for multi-part drilling template		020477
Additional drilling template for Euro-groove casement bracket		028141
Rod guide Pack of 10		010878
Pull-rod guide and connector plate	dark bronze	002750
	galvanised	002747
Rod coupling for rod 8 mm	galvanised	043546

GEZE SLIMLINE FANLIGHT OPENERS

Order information

Description	Version	ID No.
Accessories		
Standard casement bracket suitable for OL 90 N / OL 95	silver	074424
	dark bronze	074425
	white RAL 9016	074428
	black	080228
	to RAL	074427
Standard casement bracket for wooden windows with Euro-groove suitable for OL 90 N	silver	030886
	dark bronze	030887
	white RAL 9016	030890
	black	099475
	to RAL	030889
Sliding casement bracket suitable for OL 90 N / OL 95 on special window shapes	silver	084398
	dark bronze	084399
	white RAL 9016	084401
	black	084402
Sliding casement bracket suitable for OL 90 N / OL 95 on wooden windows with Euro-groove	to RAL	084403
	silver	071198
	dark bronze	071199
	white RAL 9016	071202
Additional lock for OL 90 N / OL 95 For projection height 0 - 17 mm	black	099476
	to RAL	071201
	EV1	030519
	dark bronze	030520
Additional lock for OL 90 N / OL 95 For projection height 14 - 25 mm	white RAL 9016	030523
	to RAL	030522
	EV1	030524
	dark bronze	030525
	white RAL 9016	030528
	to RAL	030527

GEZE SLIMLINE FANLIGHT OPENERS

Order information

Description	Version	ID No.
Removable crank rod, with angled crank Cut to size, per m	EV1	077434
	dark bronze	108478
	white RAL 9016	108480
	to RAL	108491
Removable crank rod, with angled crank Extended length 1400 mm	EV1	050856
	dark bronze	057589
	white RAL 9016	015879
	to RAL	015987
Fixed crank rod, with angled crank, with crank rod holder Cut to size	EV1	077433
	dark bronze	108474
	white RAL 9016	108476
	to RAL	108477
Fixed crank rod, with angled crank, with crank rod holder Extended length 1400 mm	EV1	050857
	dark bronze	050858
	white RAL 9016	015864
	to RAL	015986
Angled crank Fz45/32	brown	056952
	silver	056951
	white RAL 9016	014795
Crank rod for DIY installation Connection tube for crank rod, length 6000 mm	EV1	053262
	dark bronze	053263
	white RAL 9016	014706
Connection tube for crank rod, length 6000 mm	to RAL	015982
Accessories for hand lever, swivelling suitable for OL 90 N / OL 95	EV1	030391
	dark bronze	030392
	white RAL 9016	030395
	to RAL	030394
Hand lever with corner transmission suitable for OL 90 N / OL 95	EV1	030611
	dark bronze	030612
	white RAL 9016	030615
	black	077945
	to RAL	030614
Hand lever suitable for OL 90 N / OL 95	EV1	026882
	dark bronze	026884
	white RAL 9016	026887
	black	079113
	to RAL	026886
Hand lever, lockable suitable for OL 90 N / OL 95	EV1	083841
	dark bronze	083842
	white RAL 9016	083844
	to RAL	085230
Hand lever with bendable corner transmission for special window shapes suitable for OL 90 N / OL 95	EV1	076911
	dark bronze	076912
	white RAL 9016	076915
	black	080227
	to RAL	076916

GEZE SLIMLINE FANLIGHT OPENERS


Order information

Description	Version	ID No.
GEZE corner operating gear Fz 90	galvanised	030809
Corner transmission with integrated gear, without crank rod, without crank, left version	black	030810
GEZE corner operating gear Fz 90	galvanised	030811
Corner transmission with integrated gear, without crank rod, without crank, right version	black	030812
GEZE vertical gear Fz 91	galvanised	030817
With accessories for vertical installation, with corner transmission, without crank rod, without crank	black	030818
GEZE vertical gear Fz 91	galvanised	030822
With accessories for vertical installation, without corner transmission, without crank rod, without crank	black	030823
GEZE gear Fz 92	silver	030777
With accessories for horizontal and angular installation, without crank rod, without crank	dark bronze	030778
Corner transmission flexible for special window shapes	galvanised	071354
Corner transmission	galvanised	070546
Pillar/frame transmission Gr. 75	EV1	030744
	dark bronze	030745
	white RAL 9016	030748
	to RAL	030747
Pillar/frame transmission Gr. 150	EV1	030749
	dark bronze	030750
	white RAL 9016	030753
	to RAL	030752
Transmission for corner bracket or hinge	EV1	030902
	dark bronze	030903
	white RAL 9016	030906
	black	074510
	to RAL	030905
Flexible rod without accessories Pull length = 700 mm	brown	008481
	EV1 + white RAL 9016	022718
Flexible rod without accessories Pull length = 1000 mm	EV1 + white RAL 9016	022720
	brown	008483
Flexible rod without accessories Pull length = 1250 mm	EV1 + white RAL 9016	022721
	brown	008485
Flexible rod without accessories Pull length 350 to 3000 mm Special length cut to size	brown	072131
	EV1 + white RAL 9016	072130
Accessories for flexible rod (special window shapes)	EV1 + white RAL 9016	030862
Corner guide for flexible rod for angular or segmental arch windows	EV1 + white RAL 9016	030764
Guide for flexible rod	EV1 + white RAL 9016	022791

GEZE SLIMLINE FANLIGHT OPENERS

GEZE corner operating gear Fz 90

The corner transmission with integrated gear can be used for fixed and removable crank rods. The crank operation enables convenient operation and intermediate ventilation positions. It is used on vertically installed, inward-opening rectangular windows with bottomhung or top-hung casements. The corner operating gear Fz 90 can be used on narrow window casements from a width of 380 mm.

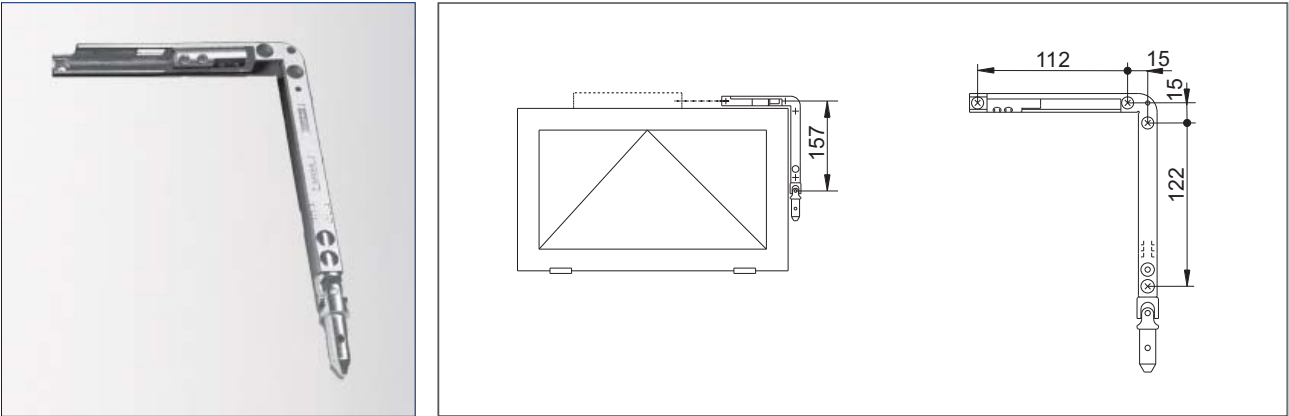

Rectangular window with GEZE Fz 90


Technical data	
Product features	GEZE corner operating gear Fz 90
Width	16 mm
Stroke	54 mm
Cross-bar diameter (rod connector)	8 mm
Crank revolutions up to max. opening	9
Optional stroke limitation	●
Fully covered by profile	●
Optional: Adjustable overload protection (set to 7 Nm in factory)	●

● = Yes

Description	Version	ID No.
GEZE corner operating gear Fz 90	galvanised	030809
Corner transmission with integrated gear, without crank rod, without crank, left version	black	030810
GEZE corner operating gear Fz 90	galvanised	030811
Corner transmission with integrated gear, without crank rod, without crank, right version	black	030812

GEZE vertical gear Fz 91

This gear can be used for fixed and removable crank rods, left and right. The crank operation enables convenient operation and intermediate ventilation positions. It is used on vertically installed, inward-opening rectangular windows with bottom-hung or top-hung casements and on angular windows in conjunction with a bendable corner bracket.

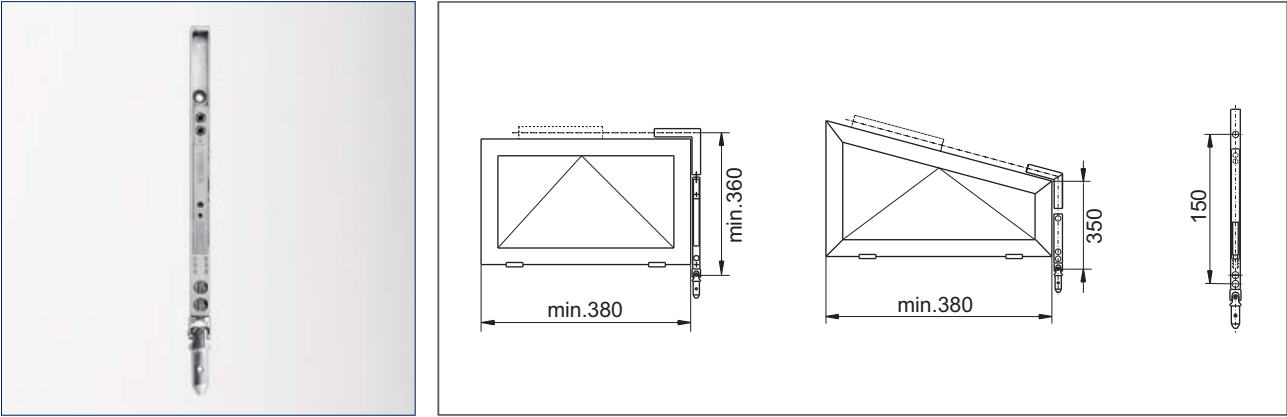

Rectangular and angular windows with GEZE Fz 91

Technical data	
Product features	GEZE vertical gear Fz 91
Width	16 mm
Stroke	54 mm
Pull-bar diameter (rod connector)	8 mm
Crank revolutions up to max. opening	9
Optional stroke limitation	•
Fully covered by profile	•
Optional: Adjustable overload protection (set to 7 Nm in factory)	•


• = Yes

Description	Version	ID No.
GEZE vertical gear Fz 91	galvanised	030822
With accessories for vertical installation, without corner transmission, without crank rod, without crank	black	030823

GEZE SLIMLINE FANLIGHT OPENERS

GEZE gear Fz 92

This gear can be used for fixed and removable crank rods, left and right. The crank makes operation easy and enables intermediate ventilation positions. It is used on vertically installed angular and triangular windows; it can also be used as a horizontal gear for rectangular windows.

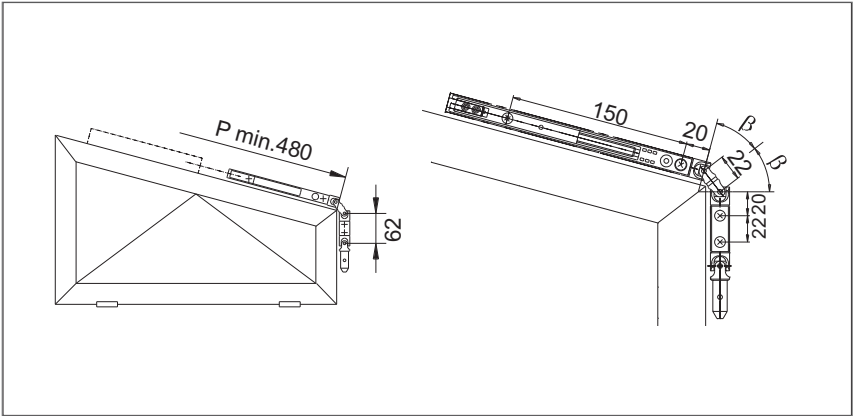

Angular window with Fz 92

Technical data	
Product features	GEZE gear Fz 92
Width	16 mm
Stroke	54 mm
Cross-bar diameter (rod connector)	8 mm
Crank revolutions up to max. opening	9
Deflection angle	90° – 160°
Optional stroke limitation	●
Fully covered by profile	●
Optional: Adjustable overload protection (set to 7 Nm in factory)	●



● = Yes

Description	Version	ID No.
GEZE gear Fz 92	silver	030777
With accessories for horizontal and angular installation, without crank rod, without crank	dark bronze	030778


Fixed crank rod

Crank rods enable flexible and convenient operation of windows.

The pivoting bearing is a flexible, galvanised or black, steel angle bracket and can be adapted to different tilt angles. It is optionally installed on the reveal, in front of the reveal or at the side in the reveal. The crank rod sits at a distance of 25 mm from the wall.

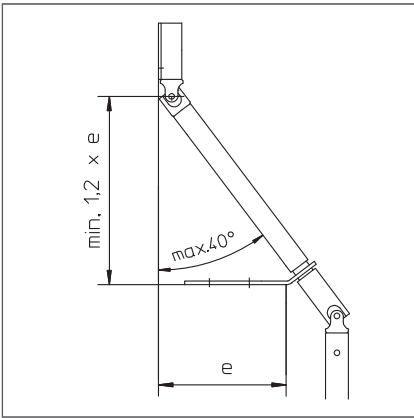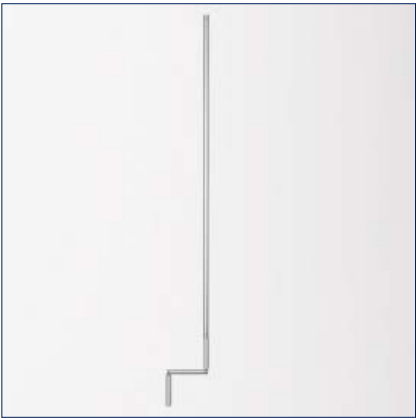

Installation drawing - pivoting bearing, fixed crank rod
e = reveal depth

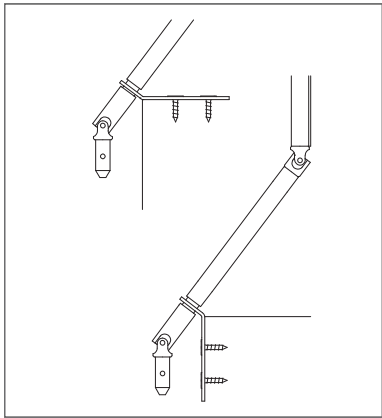

Pivot bearing for gear and crank rods

Technical data	
Product feature	Fixed crank rod, with angled crank, with crank rod holder
Diameter	15 mm



Description	Version	ID No.
Fixed crank rod, with angled crank, with crank rod holder Cut to size	EV1	077433
	dark bronze	108474
	white RAL 9016	108476
	to RAL	108477

Description	Version	ID No.
Fixed crank rod, with angled crank, with crank rod holder Extended length 1400 mm	EV1	050857
	dark bronze	050858
	white RAL 9016	015864
	to RAL	015986


GEZE SLIMLINE FANLIGHT OPENERS

Removable crank rod

Crank rods enable flexible and convenient operation of windows. The pivoting bearing is a flexible, galvanised or black, steel angle bracket and can be adapted to different tilt angles. It is optionally installed on the reveal, in front of the reveal or at the side in the reveal. The crank rod sits at a distance of 25 mm from the wall.

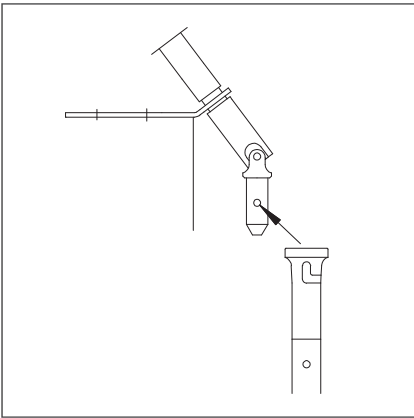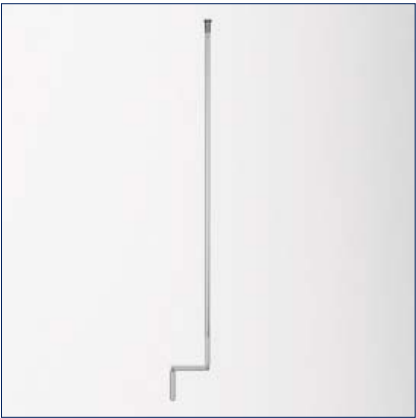

Installation drawing - pivoting bearing, removable crank rod

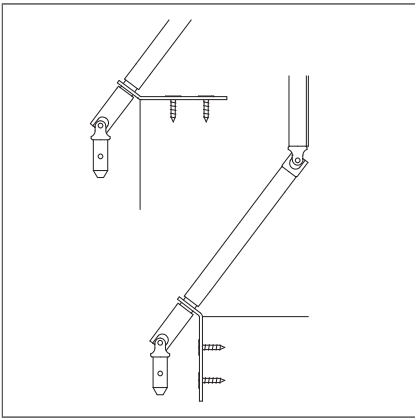

Pivot bearing for gear and crank rods

Technical data	
Product feature	Removable crank rod, with angled crank
Diameter	15 mm


Description	Version	ID No.
Removable crank rod, with angled crank Cut to size	EV1	077434
	dark bronze	108478
	white RAL 9016	108480
	to RAL	108491

Description	Version	ID No.
Removable crank rod, with angled crank Extended length 1400 mm	EV1	050856
	dark bronze	057589
	white RAL 9016	015879
	to RAL	015987

GEZE SLIMLINE FANLIGHT OPENERS

Pillar/frame transmission

The pillar/frame transmission can be used on vertically installed bottom-hung casements made of wood, plastic or metal with projection heights of 0-25 mm. The max. casement weight is 80 kg. It can be operated using a hand lever, gear Fz 91 or an electric motor. The pillar projection is bridged by a linkage bracket, see Figure.

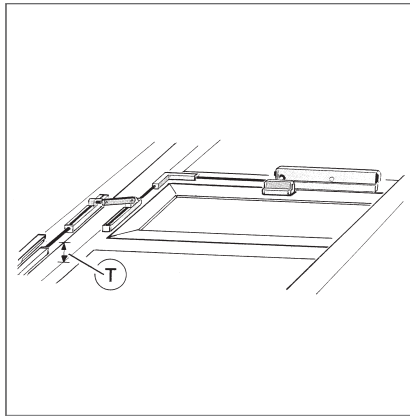

Transmission with pull rod
T = Projection between post or rail and window frame

Technical data

Product features	Pillar/frame transmission
Pillar and rail projection Size 75	T = 0–75 mm
Pillar and rail projection Size 150	T = 0–150 mm

Description

	Version	ID No.
Pillar/frame transmission size 75	EV1	030744
	dark bronze	030745
	white RAL 9016	030748
	to RAL	030747

Description


	Version	ID No.
Pillar/frame transmission size 150	EV1	030749
	dark bronze	030750
	white RAL 9016	030753
	to RAL	030752

GEZE SLIMLINE FANLIGHT OPENERS

Flexible rod

Window sill transmission with flexible rod for transmission onto different levels. The window sill transmission for the fanlight opener is simple and adaptable. Installation is fast and easy, the guide is visually attractive.

Note: The flexible window sill transmission is only suitable for a casement up to 1200 mm.

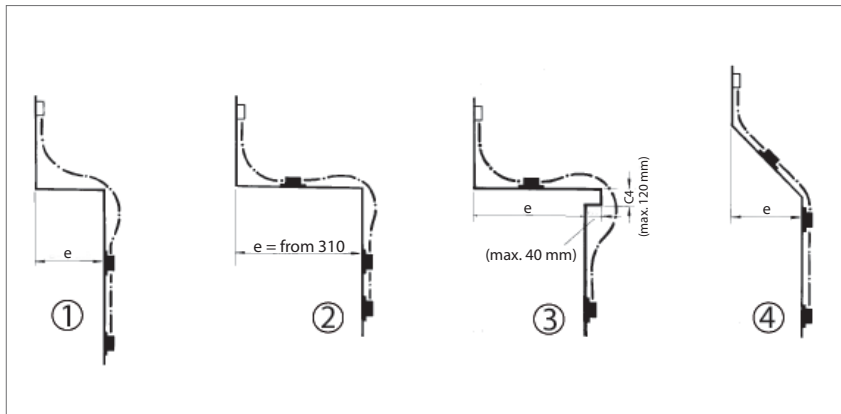

Transmission with pull rod

- 1 = window sill with reveal depth $e = \text{up to } 310 \text{ mm}$ (pull length 700 mm)
- 2 = window sill with reveal depth $e = \text{over } 310 \text{ mm}$ (pull length 700 mm up to $e = 380 \text{ mm}$)
(pull length 1000 mm up to $e = 680 \text{ mm}$)
- 3 = window sill with reveal projection (pull length 700 mm up to $e + e_1 = 310 \text{ mm}$)
(pull length 1000 mm up to $e + e_1 = 610 \text{ mm}$)
- 4 = angular window sill (pull length 700 mm up to $e = 380 \text{ mm}$)/(pull length 1000 mm up to $e = 680 \text{ mm}$)
- e = reveal depth

Technical data

Product features	Flexible rod without accessories
Pull length 700 mm	$e = 0\text{--}350 \text{ mm}$
Pull length 1000 mm	$e = 0\text{--}650 \text{ mm}$
Pull length 1250 mm	

Description	Version	ID No.
Flexible rod without accessories	EV1 + white RAL 9016	022718
Pull length = 700 mm	brown	008481


Description	Version	ID No.
Flexible rod without accessories	EV1 + white RAL 9016	022720
Pull length = 1000 mm	brown	008483

Description	Version	ID No.
Flexible rod without accessories	EV1 + white RAL 9016	022721
Pull length = 1250 mm	brown	008485

Description	Version	ID No.
Accessories for flexible transmission including connector plates	EV1 + white RAL 9016	030798
	brown	030797

Cranked rod

The cranked rod is used for reveal depths up to approx. 150 mm.

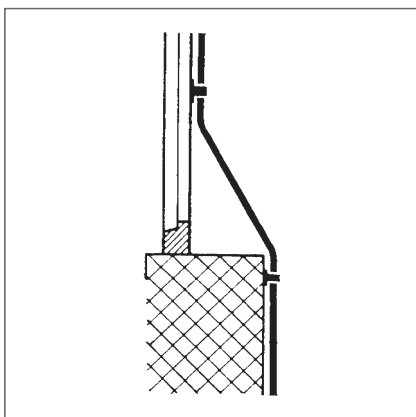


Transmission with cranked rod

Description	Version	ID No.
Pull rod Ø 10 mm, Length 2000 mm	galvanised	004892
Additional packing for cranked rod Ø 10 mm	galvanised	058124


Additional locks for OL 90 N / OL 95



Projection height 14-25 mm

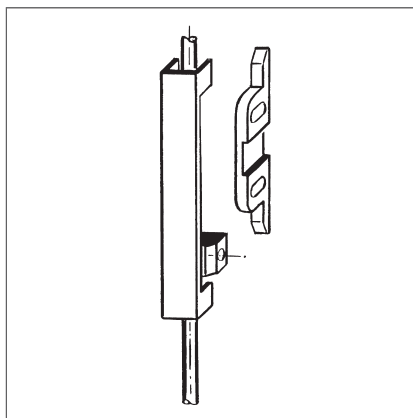

Projection height 14-25 mm

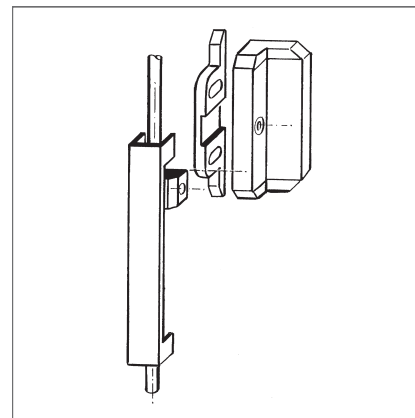

Projection height 0-17 mm



Description	Version	ID No.
Additional lock for OL 90 N / OL 95 For projection height 0 - 17 mm	EV1	030519
	dark bronze	030520
	white RAL 9016	030523
	to RAL	030522

Description	Version	ID No.
Additional lock for OL 90 N / OL 95 For projection height 14 - 25 mm	EV1	030524
	dark bronze	030525
	white RAL 9016	030528
	to RAL	030527

GEZE SLIMLINE FANLIGHT OPENERS

Concealed lock OL 90 N / OL 95

The GEZE lock carrier ensures tightness and security over the whole locked surface and is burglary resistant. The carrier is used for standard central locks (concealed locks) and is easy to clamp. The carrier is designed to match the profile and fitting. Used in conjunction with a central lock on site, all-round locking of the casement is possible.

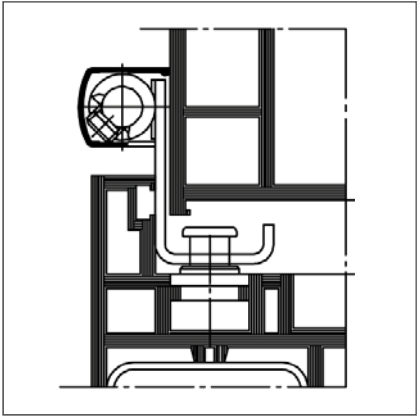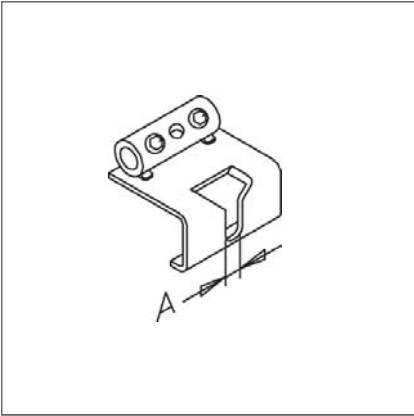

A = diameter of different locking bolts

Description	Version	ID No.
Lock carrier for OL 90 N For concealed locks with coupling OL 90 N	A=8,5 mm	024953
	A=11,5 mm	029722
	A=15,5 mm	030294

GEZE SLIMLINE FANLIGHT OPENERS

GEZE OL 320

Surface-mounted slimline fanlight opener for rectangular windows with an opening width of 320 mm




The OL 320 is suitable for heavy window casements (up to max. 250 kg). The flat design of the scissor stay and the rod assembly require little space above and to the side of the window casement. The façade elevation remains unchanged.

The locking of the opening system in the scissor stay ensures secure locking of the casement. The result is increased tightness and burglary protection of the window.

The connection between the scissor stay and casement bracket can be easily and conveniently released using the safety button. The window can therefore be effortlessly cleaned from the inside and outside. The casement can be rehung just as conveniently, because the scissor stay and casement bracket are connected by a ball-type coupling. The safety button indicates correct latching of the scissor stay in the ball head of the casement bracket.

GEZE OL 320

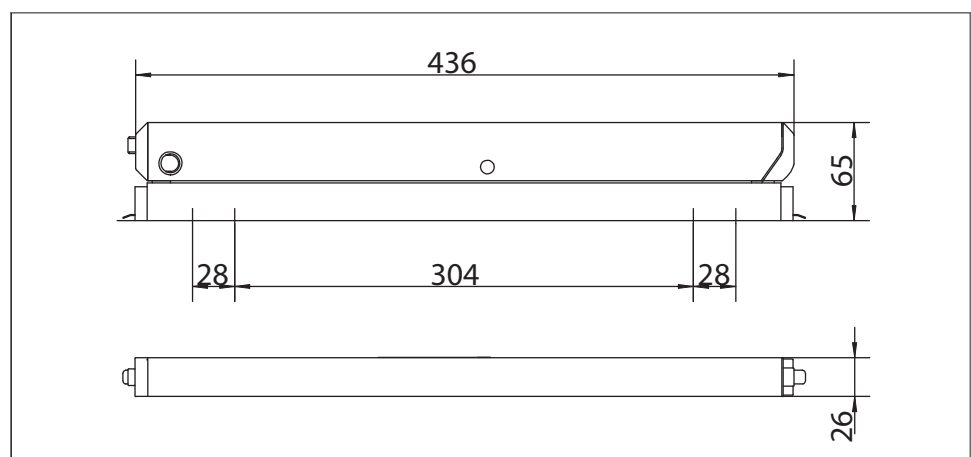

Area of application

- For vertically installed bottom-hung, top-hung, side-hung and horizontally pivot-hung casements, inward-opening, made of wood, plastic or metal
- Can be used on the left and right
- Suitable for overlap heights of 0-25 mm
- Leaf weights of up to 250 kg

GEZE SLIMLINE FANLIGHT OPENERS


GEZE OL 90 N
/OL 95/OL320

Manual Fanlight
Opener Systems


Product features	GEZE OL 320
Opening width (max.)	320 mm
Casement width (min.)	680 mm
Casement height (min.)	400 mm
Casement weight (max.)	250 kg
Length	436 mm
Depth	65 mm
Height	26 mm
Functions	
Adjustable opening width (stroke reduction)	●
Casement lock integrated in the scissor stay	●
Scissor stay unhooked by release button	●
Burglary resisting lock (SKG)	○
Lockable	○
Unhinging inhibitor	●

● = Yes ○ = No


OL 320 installation drawings

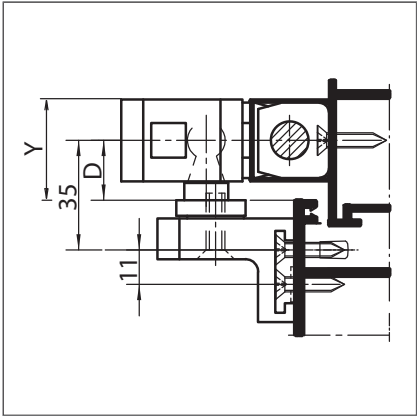


GEZE OL 320 on light alloy window with overlap

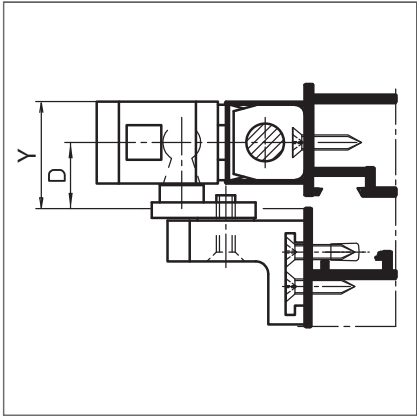

GEZE OL 320 on light alloy window, flush-closing

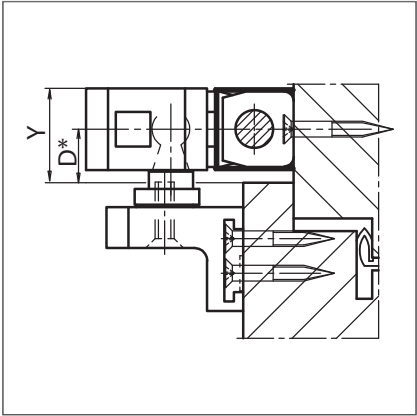


GEZE OL 320 on wooden window

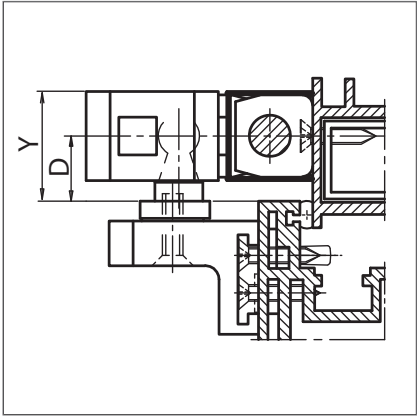

GEZE OL 320 on plastic window

D = Distance between outer edge of casement and middle of rod
D* = Distance between outer edge of casement and middle of rod (preferably 17 mm)
Y = Upper space requirement

OL 320 installation drawing for rectangular windows

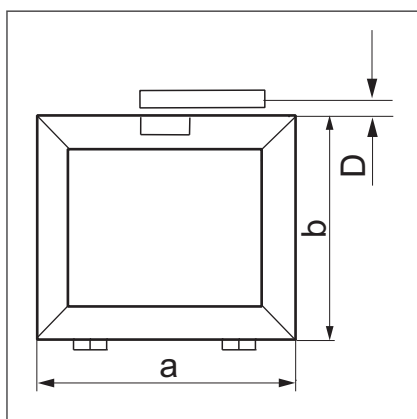

Limits of use

Number of scissor stays	Casement width a (min.)	Casement width a (max.)	Casement height b (min.)	Casement weight (max.)
1	680 mm	1 200 mm		
2	1 201 mm	2 400 mm	400 mm	250 kg
3	2 401 mm	3 600 mm		

Adjustable dimensions and space requirement

Casement height b (min.)	Casement height b (max.)	Adjustable dimension D (min.) top	Space requirement Y, top
	400 mm	23 mm	34 mm
401 mm	450 mm	21–23 mm	
451 mm	600 mm	19–23 mm	D(min) + 13
601 mm		17–23 mm	

GEZE OL 320



GEZE SLIMLINE FANLIGHT OPENERS

Order information

Description	Version	ID No.
GEZE OL 320 with unhinging inhibitor and sliding casement bracket	EV1	131288
	white RAL 9016	131289
	to RAL	131290
GEZE OL 320 with sliding casement bracket	EV1	128211
	white RAL 9016	128212
	to RAL	128213
Installation materials		
Drilling template for wood		137150
Drilling template for metal and plastic		137152
Rod guide		058653
Connection rod Length 168 mm	galvanised	059728
Connection rod For casement widths up to 1200 mm (1 scissor stay), length 820 mm	galvanised	059726
Connection rod For casement widths up to 2400 mm (2 scissor stays), length 2000 mm	galvanised	059727
Rod Ø 12 mm Available from stock Fixpack (25)		
Length 2000 mm	galvanised	053198
Length 3000 mm	galvanised	053199
Length 6000 mm	galvanised	054116
Corner bracket cover OL 320	EV1	012560
	white RAL 9016	018245
	to RAL	015459
Cover profile OL 320 Length 2000 mm	EV1	058771
	white RAL 9016	018293
	to RAL	014258
Cover profile OL 320 Length 3000 mm	EV1	058774
	white RAL 9016	018294
	to RAL	014259
Cover profile OL 320 Length 6000 mm	EV1	058630
	white RAL 9016	018251
	to RAL	013814
Additional packing, end cover (for end of scissor stay)	EV1	058633
	white RAL 9016	018254
	to RAL	013816
Additional angle for overlap height 0-12 mm	EV1	050727
	white RAL 9016	015519
	to RAL	013077

GEZE SLIMLINE FANLIGHT OPENERS


Order information

Description	Version	ID No.
Additional lock for OL 320 without additional angle, overlap height 12-25 mm	EV1	063974
	white	018257
	to RAL	013080
Lock carrier for OL 320 Aluminium windows	8.5 mm	024954
	11.5 mm	029717
Lock carrier for OL 320 Wood and plastic windows	8.5 mm	029855
	11.5 mm	029856
	15.5 mm	030295
Lock carrier for OL 320 Light alloy windows	8.5 mm	028905
Accessories		
Standard casement bracket suitable for OL 320 with back plate, short	EV1	139179
	white RAL 9016	139180
	to RAL	139211
Hand lever Stroke 42 mm, for opening widths up to approx. 220 mm suitable for OL 320	EV1	131658
	white RAL 9016	131659
	to RAL	131660
Hand lever Stroke 70 mm, for opening widths up to approx. 320 mm suitable for OL 320	EV1	131652
	white RAL 9016	131653
	to RAL	131654
Hand lever Stroke 70 mm, with corner transmission suitable for OL 320	EV1	131610
	white RAL 9016	131611
	to RAL	131612
GEZE corner operating gear Fz 100 Without crank rod, without crank		018194
GEZE vertical gear Fz 101 Without crank rod, without crank		018196

GEZE SLIMLINE FANLIGHT OPENERS

GEZE corner operating gear Fz 100

The corner transmission with integrated gear for fixed and removable crank bars ensures ease of use and enables intermediate ventilation positions. The corner operating gear can be used on the left and right on vertically installed, inward-opening bottom-hung casements. It can be used on rectangular windows and, thanks to the bendable corner transmission, it can also be used on angular windows.

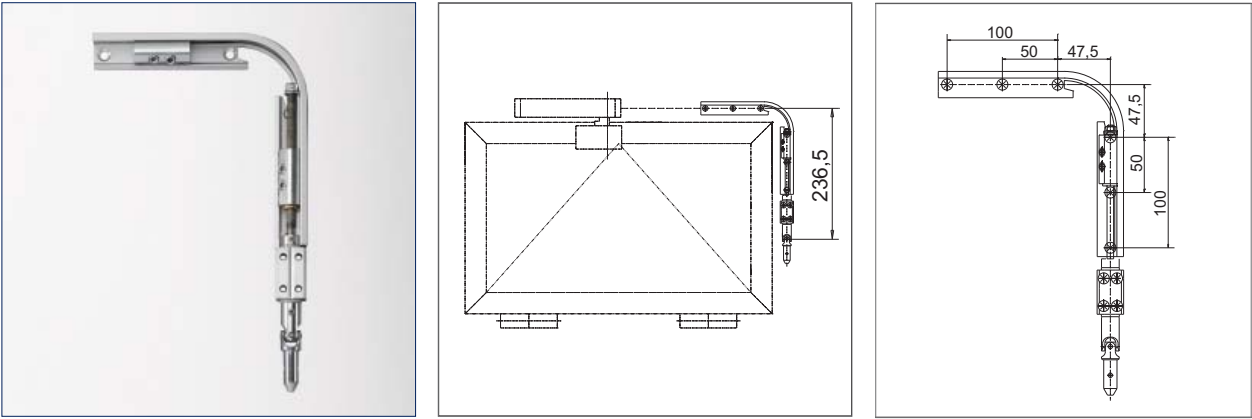

Rectangular window with GEZE Fz 100


Technical data	
Product features	GEZE corner operating gear Fz 100
Width	26 mm
Stroke	70 mm
Cross-bar diameter (rod connector)	12 mm
Crank revolutions up to max. opening	10
Optional stroke limitation	•
Fully covered by profile	•
Optional: Adjustable overload protection (set to 7 Nm in factory)	•

• = Yes

Description	ID No.
GEZE corner operating gear Fz 100	018194
Without crank rod, without crank	

GEZE vertical gear Fz 101

The corner operating gear for fixed and removable crank rods can be used on the left and right on vertically installed, inward-opening bottom-hung casements. The crank makes operation easy and enables intermediate ventilation positions. It can be used on rectangular windows and, thanks to the bendable corner transmission, it can also be used on angular windows.

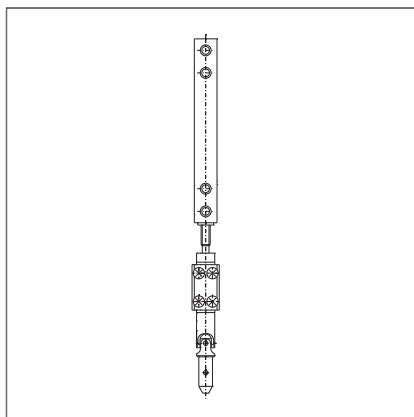

Technical data

Product features	GEZE corner operating gear Fz 101
Width	26 mm
Stroke	70 mm
Cross-bar diameter (rod connector)	12 mm
Crank revolutions up to max. opening	10
Optional stroke limitation	•
Fully covered by profile	•
Optional: Adjustable overload protection (set to 7 Nm in factory)	•

• = Yes


Description

Description	ID No.
GEZE vertical gear Fz 101	018196
Without crank rod, without crank	

GEZE SLIMLINE FANLIGHT OPENERS

Additional lock OL 320

A corner transmission is also required if used on the opposite side to the hand lever.

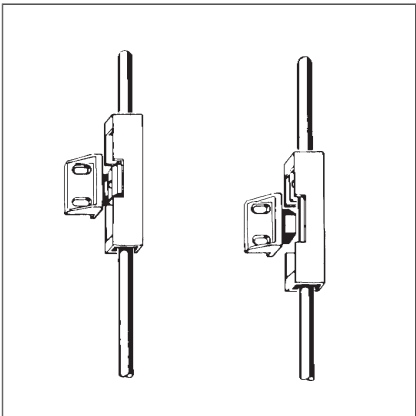



Description	Version	ID No.
Additional lock for OL 320 without additional angle, overlap height 12-25 mm	EV1	063974
	white	018257
	to RAL	013080

Concealed lock OL 320

The GEZE lock carrier ensures tightness and security over the whole locked surface and is burglary resistant.

The carrier is used for standard central locks (concealed locks) and is easy to clamp.

The carrier is designed to match the profile and fitting. Used in conjunction with a central lock on site, all-round locking of the casement is possible.

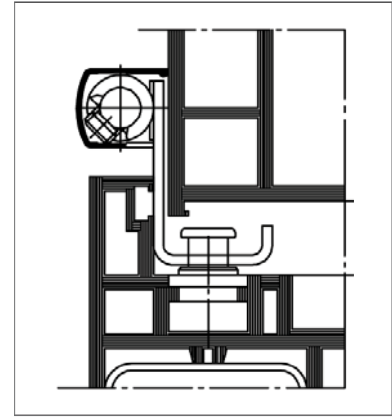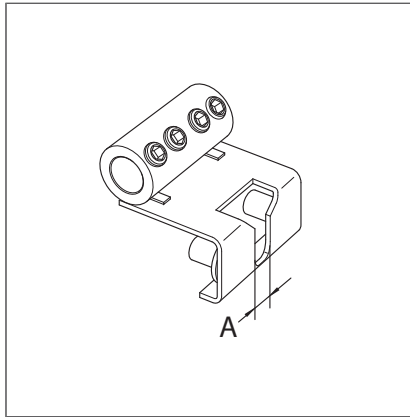

A = diameter of different locking bolts

Description	Version	ID No.
Lock carrier for OL 320	A = 8,5 mm	024954
Aluminium windows	A = 11,5 mm	029717

Description	Version	ID No.
Lock carrier for OL 320	A = 8,5 mm	029855
Wood and plastic windows	A = 11,5 mm	029856
	A = 15,5 mm	030295


Description	ID No.
Lock carrier for OL 320	028905
Light alloy windows	

GEZE SLIMLINE FANLIGHT OPENERS

GEZE gripping and cleaning scissor stay (FPS)

For bottom-hung casements, safeguards must be provided in addition to the fanlight opener, which limit the tilting movement of the casement (grip position), so that the casements do not become a source of danger. GEZE FPS is the «intelligent» gripping and cleaning scissor stay for vertically installed bottom-hung rectangular windows. Up to the cleaning position, the arresting bolts slide along guide shafts in a telescopic rod. This merely requires the left-hand rod to be raised by hand. If the casement threatens to fall, the arresting bolts are hurled into the opposite arresting hooks by the guide rollers and therefore stop the fall. Two FPS gripping and cleaning scissor stays and two accessory mounting plates are necessary for wooden/plastic and light alloy windows.

GEZE gripping and cleaning scissor stay (FPS)

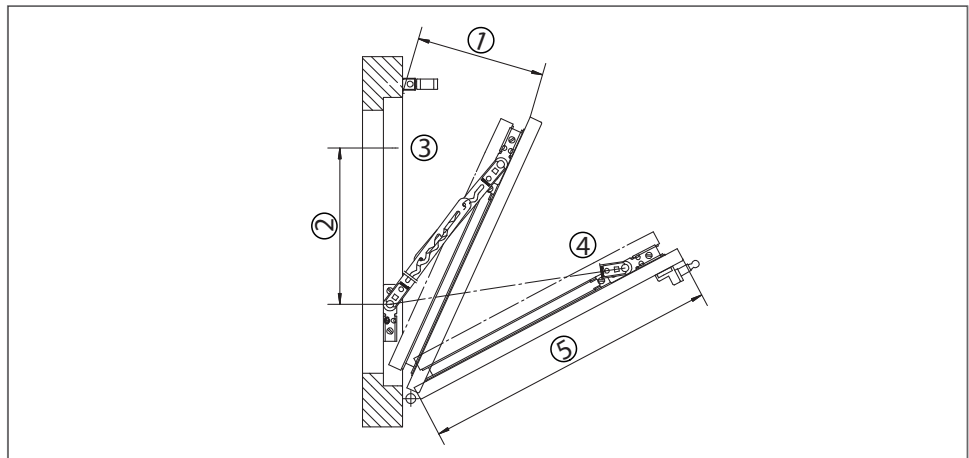


- 1 = restricted opening width
- 2 = length when closed
- 3 = gripping position
- 4 = cleaning position
- 5 = casement height

Area of application


- For OL 90 N, OL 95 and OL 320
- For vertically installed bottom-hung casements
- For rectangular windows
- Rebate width min. 11 mm
- Rebate depth min. 18 mm

GEZE SLIMLINE FANLIGHT OPENERS


Gripping and cleaning scissor stay (FPS) - installation drawings

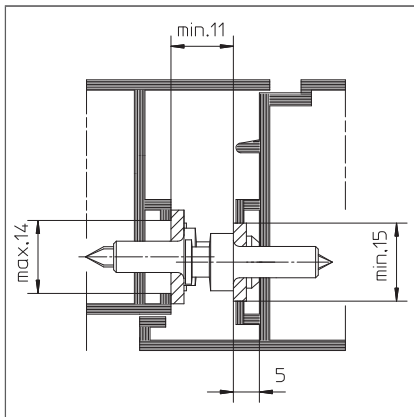

FPS on light alloy window (installation without washers)

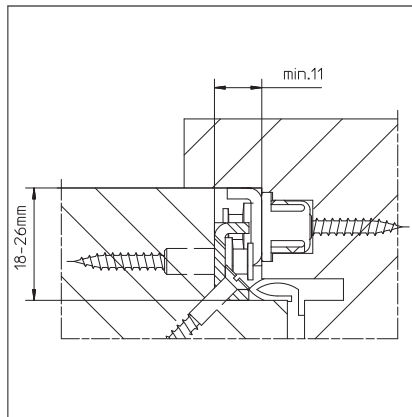

FPS on wooden window

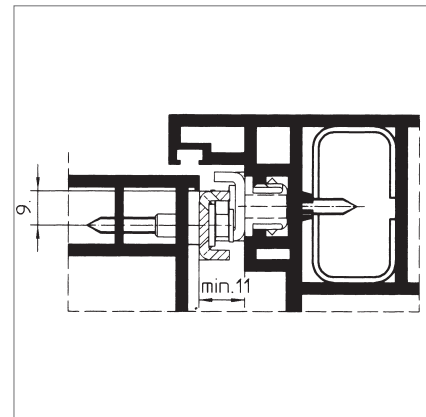

FPS on plastic window

Order information

Description	Version	ID No.
GEZE gripping and cleaning scissor stay (FPS) FPS 340 Size 1	galvanised	030249
GEZE gripping and cleaning scissor stay (FPS) FPS 520 Size 2	galvanised	030250
GEZE gripping and cleaning scissor stay (FPS) FPS 720 Size 3	galvanised	030251
Installation materials		
Mounting plates for gripping and cleaning scissor stay For light alloy windows (fixings for casement and frame)		030252
Mounting plates for gripping and cleaning scissor stay For plastic windows (fixings for casement with Euro-groove and frame)		030253
Mounting plates for gripping and cleaning scissor stay For wooden and plastic windows (fixings for casement with Euro-groove and frame)		070182
Frame washers for gripping and cleaning scissor stay For plastic windows	3 mm	029334
	5 mm	029335
Frame washers for gripping and cleaning scissor stay For plastic windows with inclined rebate		030383
Casement shim for gripping and cleaning scissor stay	4 mm	009324
	5 mm	009325
	7 mm	013305
	8 mm	025635
	9 mm	009321
Frame washers for gripping and cleaning scissor stay For light alloy windows	3 mm	009326
	5 mm	009328
Rebate templates for gripping and cleaning scissor stay (FPS)		024741

GEZE SLIMLINE FANLIGHT OPENERS

GEZE OL 90 N and OL 95 - photographic overview

GEZE lockable hand lever



GEZE swivel-mounted hand lever



GEZE corner transmission



GEZE hand lever with bendable corner transmission



GEZE sliding casement bracket



GEZE scissor stay with unhinging inhibitor



GEZE lockable scissor stay



GEZE corner operating gear Fz 90, left



GEZE vertical gear Fz 91 with corner transmission



GEZE gear Fz 92




References



Alfter Art College, Alfter near Bonn
















Augustinum, Stuttgart

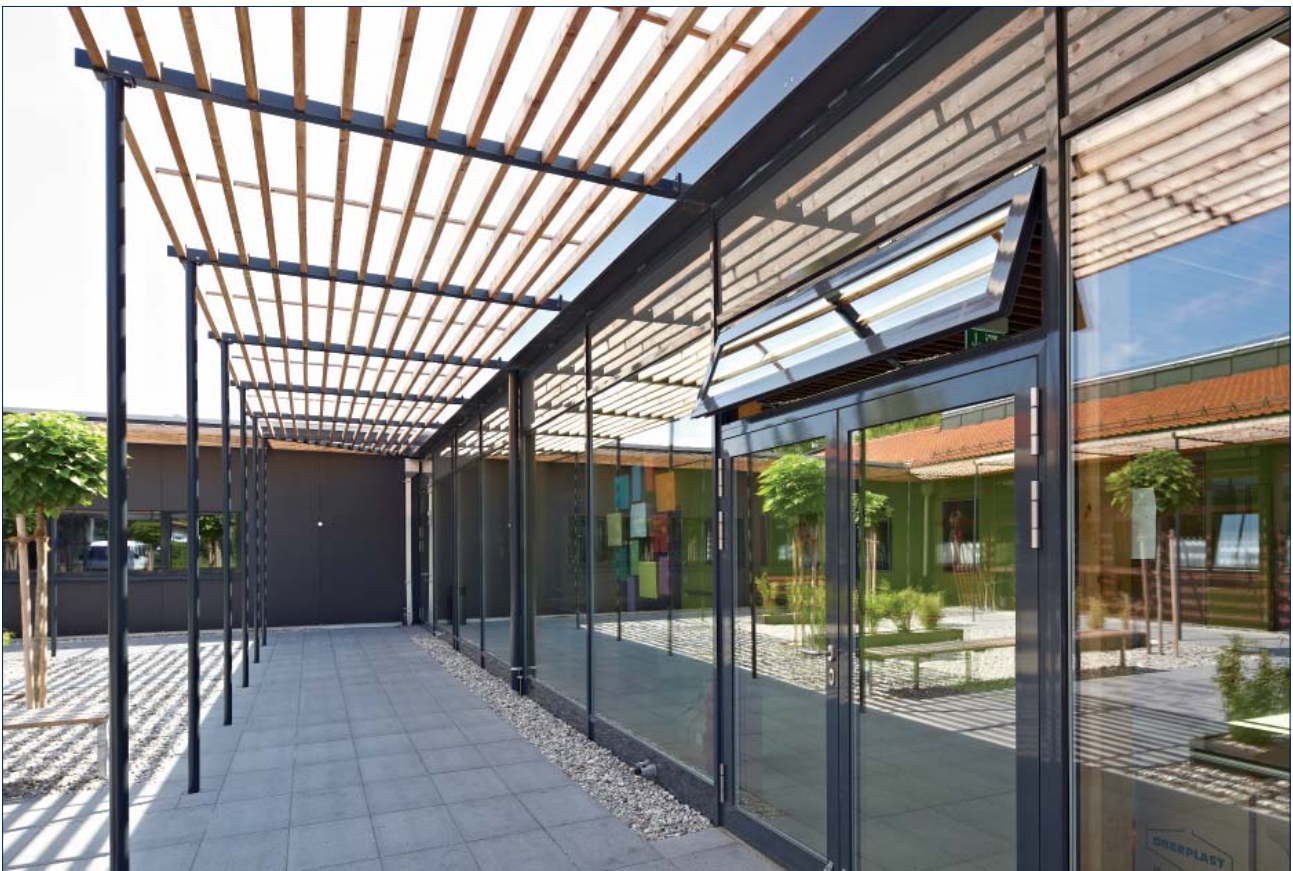

Fondation Ecksberg, Mühl Dorf


Packaging unit applications: GEZE OL 90 N

Applications	Packing units					
	ID. No.		ID. No.		ID. No.	
	Scissor		Hand lever with corner transmission		Corner operating gear Fz 90, left	
	silver	030373	silver	030611	silver	030809
	white RAL 9016	030377	white RAL 9016	030615	white RAL 9016	030810
						

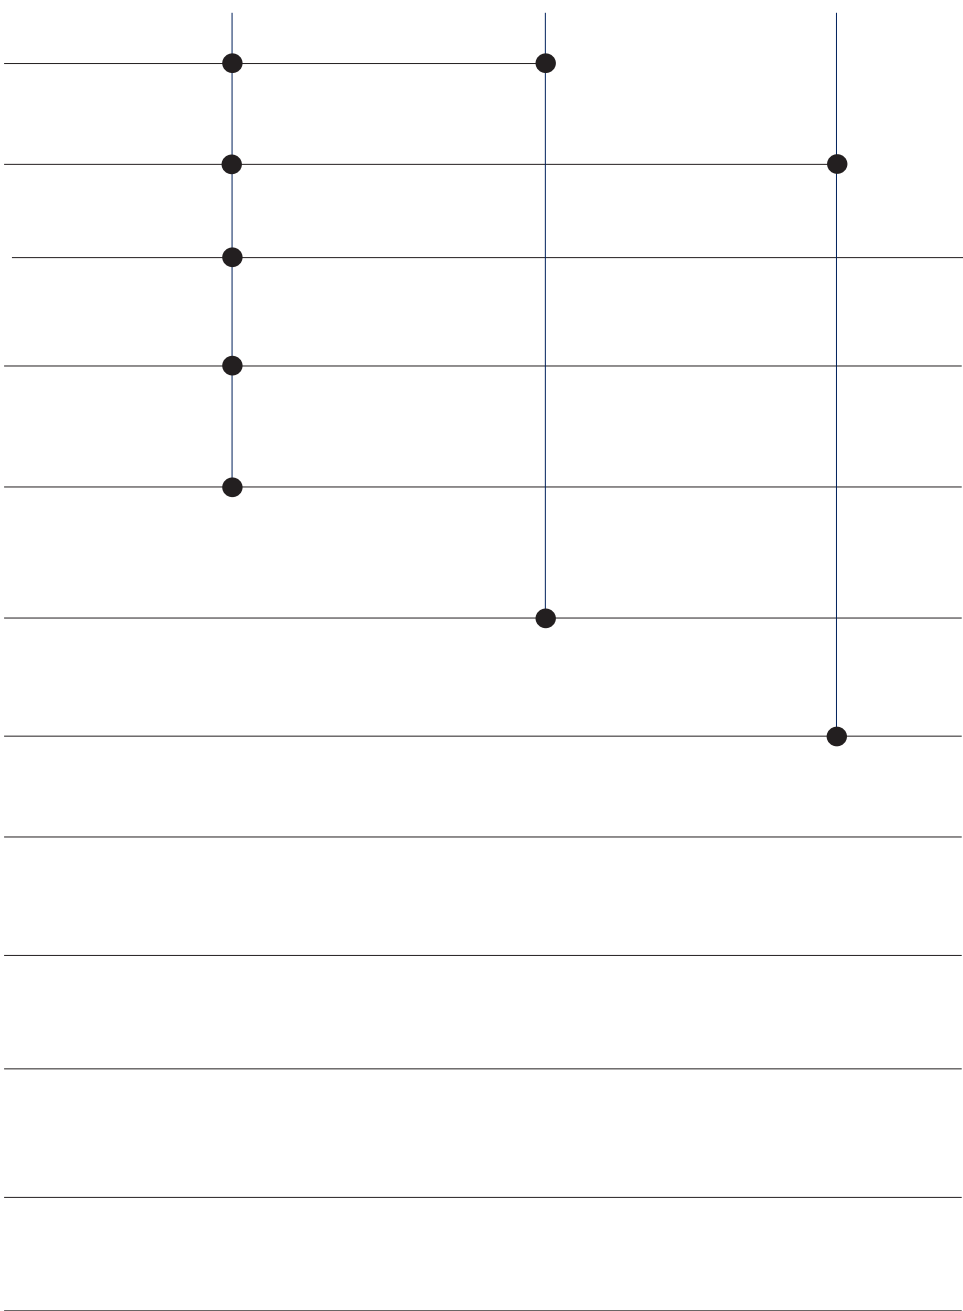

GEZE SLIMLINE FANLIGHT OPENERS

Packing units					
ID. No.	ID. No.	ID. No.	ID. No.	ID. No.	ID. No.
Corner operating gear Fz 90, right	Vertical gear Fz 91 with corner transmission	Gear Fz 92	Scissor stay with unhinging inhibitor	Hand lever with bendable corner transmission	Scissor stay with sliding casement bracket
galvanised 030811 black 030812	galvanised 030817 black 030818	silver/white 030778	silver 030498 white RAL 9016 030502	silver 076911 white RAL 9016 076915	silver white RAL 9016 Scissor stay and corresponding casement bracket
					

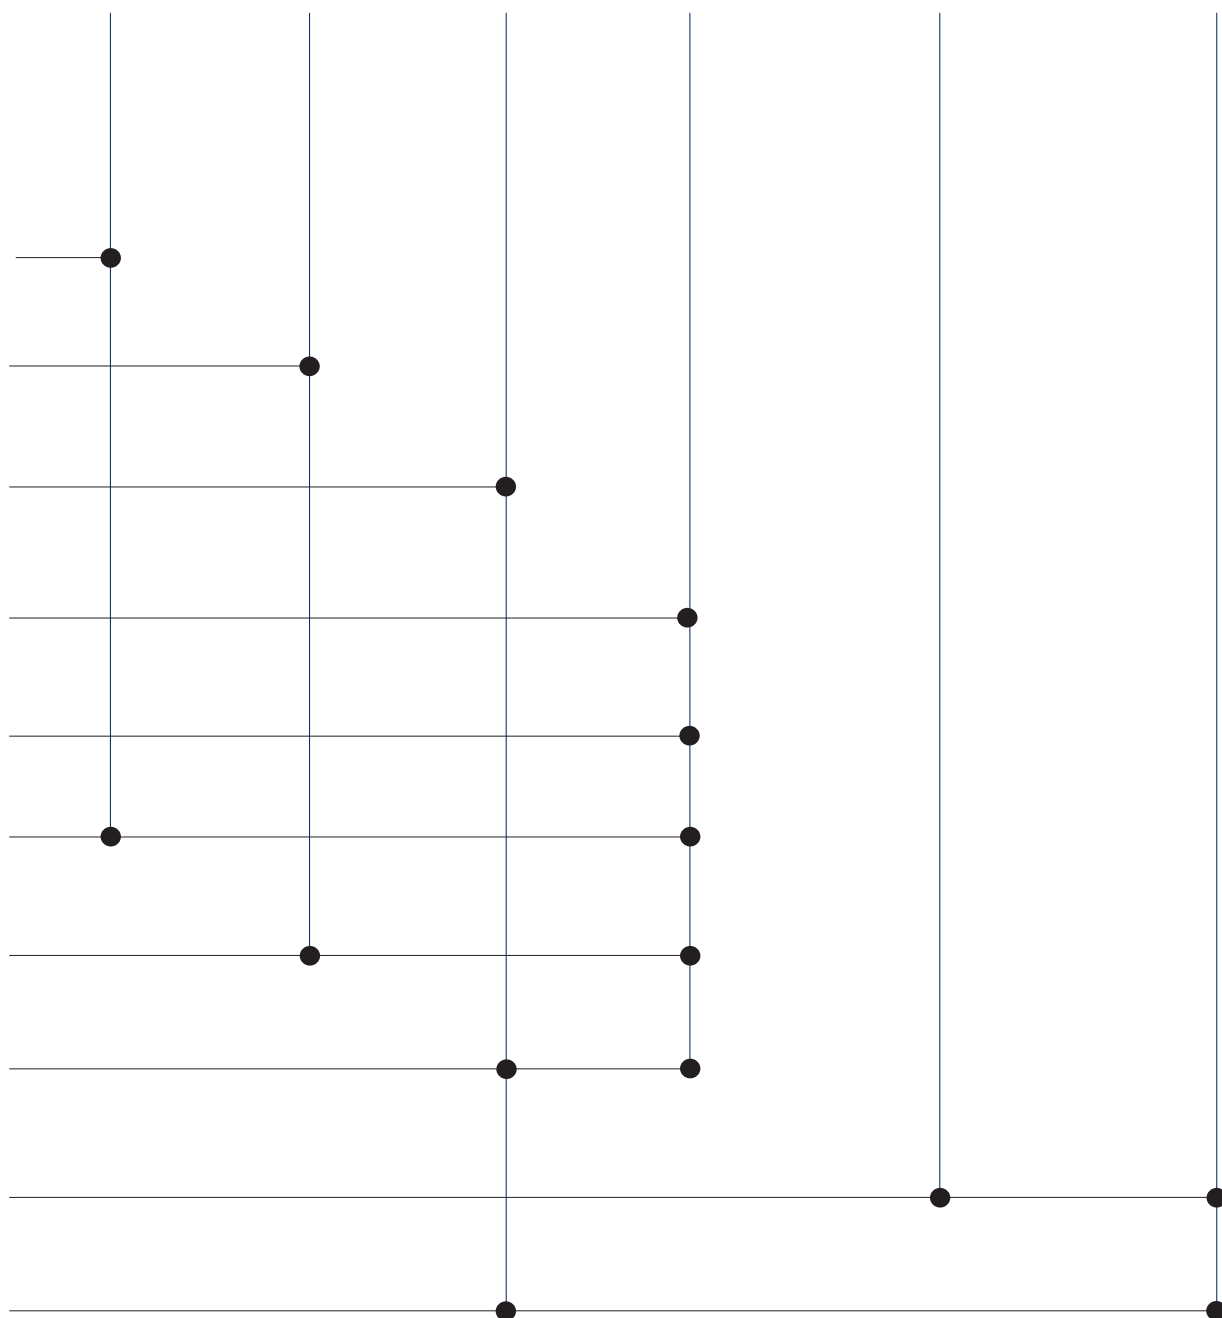

GEZE GmbH
P.O. Box 1363
71226 Leonberg
Germany

GEZE GmbH
Reinhold-Vöster-Straße 21-29
71229 Leonberg
Germany
Telefon +49 (0) 7152-203-0
Telefax +49 (0) 7152-203-310

www.geze.com

Germany
 GEZE Sonderkonstruktionen GmbH
 Planken 1
 97944 Boxberg-Schweigern
 Tel. +49 (0) 7930-92 94-0
 Fax +49 (0) 7930-92 94-10
 E-Mail: sk.de@geze.com

GEZE GmbH
 Niederlassung Nord/Ost
 Böhrlingstraße 8
 13086 Berlin (Weissensee)
 Tel. +49 (0) 30-47 89 90-0
 Fax +49 (0) 30-47 89 90-17
 E-Mail: berlin.de@geze.com

GEZE GmbH
 Niederlassung West
 Nordsternstraße 65
 45329 Essen
 Tel. +49 (0) 201-83 082-0
 Fax +49 (0) 201-83 082-20
 E-Mail: essen.de@geze.com

GEZE GmbH
 Niederlassung Mitte
 Adenauerallee 2
 61440 Oberursel (b. Frankfurt)
 Tel. +49 (0) 6171-63 610-0
 Fax +49 (0) 6171-63 610-1
 E-Mail: frankfurt.de@geze.com

GEZE GmbH
 Niederlassung Süd
 Reinhold-Vöster-Straße 21-29
 71229 Leonberg
 Tel. +49 (0) 7152-203-594
 Fax +49 (0) 7152-203-438
 E-Mail: leonberg.de@geze.com

GEZE Service GmbH NL Südwest
 Reinhold-Vöster-Straße 25
 71229 Leonberg
 Tel. +49 (0) 7152-92 33 34

GEZE Service GmbH NL Nord-Ost
 Böhrlingstraße 8
 13086 Berlin (Weissensee)
 Tel. +49 (0) 30-47 02 17 32

GEZE Service GmbH NL West
 Nordsternstraße 65
 45329 Essen
 Tel. +49 (0) 201-8 30 82 16

GEZE Service GmbH NL Mitte
 Feldbergstrasse 59
 61440 Oberursel
 Tel. +49 (0) 6171-63 61 03

GEZE Service GmbH NL Süd
 Keltenring 10
 85658 Eggenmating
 Tel. +49 (0) 8095-87 13 61

Austria
 GEZE Austria
 Wiener Bundesstrasse 85
 A-5300 Hallwang
 Tel: +43/6225/87180
 Fax: +43/6225/87180-299
 E-Mail: austria.at@geze.com

Baltic States
 GEZE GmbH Baltic States office
 Dzelzavas iela 120 S
 1021 Riga
 Tel. +371 (0) 67 89 60 35
 Fax +371 (0) 67 89 60 36
 E-Mail: office-latvia@geze.com

Benelux
 GEZE Benelux B.V.
 Leemkuil 1
 Industrieterrein Kapelbeemd
 5626 EA Eindhoven
 Tel. +31 (0) 40-26 290-80
 Fax +31 (0) 40-26 290-85
 E-Mail: benelux.nl@geze.com

Bulgaria
 GEZE Bulgaria - Trade
 Representative Office
 61 Pirinski Prohod, entrance „B“,
 4th floor, office 5,
 1680 Sofia
 Tel. +359 (0) 24 70 43 73
 Fax +359 (0) 24 70 62 62
 E-Mail: office-bulgaria@geze.com

China
 GEZE Industries (Tianjin) Co., Ltd.
 Shuangchenzhong Road
 Beichen Economic Development
 Area (BEDA)
 Tianjin 300400, P.R. China
 Tel. +86 (0) 22-26 97 39 95-0
 Fax +86 (0) 22-26 97 27 02
 E-Mail: Sales-info@geze.com.cn

GEZE Industries (Tianjin) Co., Ltd.
 Branch Office Shanghai
 Unit 25N, Cross Region Plaza
 No 899, Ling Ling Road,
 XuHui District
 200030 Shanghai, P.R. China
 Tel. +86 (0) 21-523 40 960
 Fax +86 (0) 21-644 72 007
 E-Mail: chinasales@geze.com.cn

GEZE Industries (Tianjin) Co., Ltd.
 Branch Office Guangzhou
 Room 17C3
 Everbright Bank Building, No.689
 Tian He Bei Road
 510630 Guangzhou
 P.R. China
 Tel. +86 (0) 20-38 73 18 42
 Fax +86 (0) 20-38 73 18 34
 E-Mail: chinasales@geze.com.cn

GEZE Industries (Tianjin) Co., Ltd
 Branch Office Beijing
 Room 1001, Tower D
 Sanlitun SOHO
 No. 8, Gongti North Road,
 Chaoyang District
 100027 Beijing, P.R.China
 Tel. +86 (0) 10-59 35 93 00
 Fax +86 (0)10-59 35 93 22
 E-Mail: chinasales@geze.com.cn

France
 GEZE France S.A.R.L.
 ZAC de l'Orme Rond
 RN 19
 77170 Servon
 Tel. +33 (0) 1-60 62 60-70
 Fax +33 (0)1-60 62 60-71
 E-Mail: france.fr@geze.com

Hungary
 GEZE Hungary Kft.
 Bartók Béla út 105-113.
 Budapest
 H-1115
 Tel. +36 (1) 481 4670
 Fax +36 (1) 481 4671
 E-Mail: office-hungary@geze.com

Iberia
 GEZE Iberia S.R.L.
 Pol. Ind. El Pla
 C/Comerc, 2-22, Nave 12
 08980 Sant Feliu de Llobregat
 (Barcelona)
 Tel. +34 (0) 9-02 19 40 36
 Fax +34 (0) 9-02 19 40 35
 E-Mail: info@geze.es

India
 GEZE India Private Ltd.
 MF 2 & 3, Guindy Industrial Estate
 Ekkattuthangal
 Chennai 600 097
 Tamilnadu
 Tel. +91 (0) 44 30 61 69 00
 Fax +91 (0) 44 30 61 69 01
 E-Mail: office-india@geze.com

Italy
 GEZE Italia Srl
 Via Giotto, 4
 20040 Cambiago (MI)
 Tel. +39 (0) 29 50 695-11
 Fax +39 (0) 29 50 695-33
 E-Mail: italia.it@geze.com

GEZE Engineering Roma Srl
 Via Lucrezia Romana, 91
 00178 Roma
 Tel. +39 (0) 6-72 65 311
 Fax +39 (0) 6-72 65 3136
 E-Mail: roma@geze.biz

Poland
 GEZE Polska Sp.z o.o.
 ul. Annapol 21
 03-236 Warszawa
 Tel. +48 (0) 22 440 4 440
 Fax +48 (0) 22 440 4 400
 E-Mail: geze.pl@geze.com

Romania
 GEZE Romania s.r.l.
 IRIDE Business Park,
 Str. Dimitrie Pompeiu nr. 9-9a,
 Building 10, Level 2, Sector 2,
 020335 Bucharest
 Tel.: +40 (0) 21 25 07 750
 Fax: +40 (0) 21 25 07 750
 E-Mail: office-romania@geze.com

Russian Federation
 GEZE GmbH Representative
 Office Russia
 Kolodesnij pereulok3, str. 25
 Office Nr. 5201-5203
 107076 Moskau
 Tel. +7 (0) 49 55 89 90 52
 Fax +7 (0) 49 55 89 90 51
 E-Mail: office-russia@geze.com

Scandinavia – Sweden
 GEZE Scandinavia AB
 Mallslingan 10
 Box 7060
 18711 Täby, Sweden
 Tel. +46 (0) 8-7323-400
 Fax +46 (0) 8-7323-499
 E-Mail: sverige.se@geze.com

Scandinavia – Norway
 GEZE Scandinavia AB avd. Norge
 Industriveien 34 B
 2073 Dal
 Tel. +47 (0) 639-57 200
 Fax +47 (0) 639-57 173
 E-Mail: norge.se@geze.com

Scandinavia – Finland
 Branch office of GEZE Scandinavia AB
 Herrlantie 824
 Postbox 20
 15871 Hollola
 Tel. +358 (0) 10-40 05 100
 Fax +358 (0) 10-40 05 120
 E-Mail: finland.se@geze.com

Scandinavia – Denmark
 GEZE Danmark
 Branch office of GEZE Scandinavia AB
 Märkærvej 13 J-K
 2630 Taastrup
 Tel. +45 (0) 46-32 33 24
 Fax +45 (0) 46-32 33 26
 E-Mail: danmark.se@geze.com

South Africa
 DCLSA Distributors (Pty.) Ltd.
 118 Richards Drive, Halfway House,
 Ext 111
 P.O. Box 7934, Midrand 1685
 Tel. +27 (0) 1131 58 286
 Fax +27 (0) 1131 58 261
 E-Mail: info@dclsa.co.za

Switzerland
 GEZE Schweiz AG
 Bodenackerstrasse 79
 4657 Dulliken
 Tel. +41 (0) 62-28 55 400
 Fax +41 (0) 62-28 55 401
 E-Mail: schweiz.ch@geze.com

Turkey
 GEZE GmbH Türkiye - İstanbul
 İrtibat Bürosu
 Ataşehir Bulvarı, Ata 2/3
 Plaza Kat: 9 D: 84 Ataşehir
 Kadıköy / İstanbul
 Tel. +90 (0) 21 64 55 43 15
 Fax +90 (0) 21 64 55 82 15
 E-Mail: office-turkey@geze.com

Ukraine
 GEZE GmbH Representative
 Office Ukraine
 ul. Viskoznaya, 17,
 Building 93-B, Office 12
 02094 Kiev
 Tel./Fax +38 (0) 44 501 22 25
 Tel. +38 (0) 44 499 77 25
 E-Mail: office-ukraine@geze.com

United Arab Emirates/GCC
 GEZE Middle East
 P.O. Box 17903
 Jebel Ali Free Zone
 Dubai
 Tel. +971 (0) 4-88 33 112
 Fax +971 (0) 4-88 33 240
 E-Mail: geze@emirates.net.ae

United Kingdom
 GEZE UK Ltd.
 Blenheim Way
 Fradley Park
 Lichfield
 Staffordshire WS13 8SY
 Tel. +44 (0) 1543 44 30 00
 Fax +44 (0) 1543 44 30 01
 E-Mail: info.uk@geze.com

GEZE REPRESENTATIVE